



**ADR 80/03 Model**  
**4 x 2 Cab Chassis**

\* Illustration may contain item not standard to the model

## KEY FEATURES

- Cruise Control
- ABS Brakes with ASR
- Easy Start – Take-off Assist
- Front-axle Stabiliser
- Air Suspension on rear axle
- Drivers SRS Airbag
- Heated & Electrically Operated External Mirrors
- FUP (ADR 84/00 Complied)
- ISRI 6800 Driver seat with integrated Safety Belt

## KEY SPECIFICATIONS

<b>GVM.</b>	. . . . . 14,000kg Opt 12,000kg
<b>GCM.</b>	. . . . . 22,000kg
<b>Power</b>	. . . . . 191kW @ 2400 RPM
<b>Torque.</b>	. . . . . 794Nm @ 1500 RPM
<b>Transmission</b>	. . . . . Six-speed OD synchromesh
<b>Wheelbase</b>	. . . . . 4850mm (Long), 5500mm (X Long)





# FE 1426 Air Engine & Driveline specifications

## ENGINE

Model	HINO J07E-TN
Max. output (ISO Net)	191kW (260 PS) at 2400 RPM
Max. output (JIS GROSS)	195kW (265 PS) at 2400 RPM
Max. torque (ISO Net)	794Nm (81kgf/m) at 1500 RPM
Max. torque (JIS GROSS)	804Nm (82kgf/m) at 1500 RPM
Max. engine speed	2400 RPM
Engine compliance	ADR 80/03
Type	Diesel, turbocharged & intercooled, five-cylinder in-line, overhead camshaft & water-cooled
Combustion system	Direct injection with EGR
Bore & stroke	112 x 130mm
Piston displacement	6.403L
Compression ratio	17:1
Engine oil capacity	11.7L
Coolant capacity	23.5L
Fuel injection pump	Electronic control common-rail type
Intake system	Stack-type air intake
Air cleaner	Dual paper elements
Air compressor	Single cylinder, water-cooled
Bore & stroke	70 x 40mm
Fan clutch	Equipped
Exhaust	Horizontal outlet with DPR
Emission Control System	EGR & DPR meeting ADR 80/03 using EURO V Std

## CLUTCH

Model	CSP 380 series
Type	Dry single plate with damper springs
Facing material	Moulded (non-asbestos)
Facing outside diameter	380mm
Control	Hydraulic with air booster

## TRANSMISSION & GEAR RATIOS

Model	LJ06S
Type	Six forward & one reverse speeds, overdrive, synchronesh on 2nd to 6th
Control	Cable with power shift
Rear axle gear ratio	4.555:1

1st	.6.477	5th	.1.000
2nd	.4.382	6th	.0.723
3rd	.2.450	Rev.	.6.064
4th	.1.470		

## PERFORMANCE

Calculations based on 14.0 ton GVM, 265/70R19.5 tyre	
Engine RPM @ 100km/h	2090
Max theoretical speed (km/h)	115
Gradeability tan $\theta$ (%) @ GVM	39.4

## BRAKES

Type	Hydraulic system with two leading shoes front & rear acting on all wheels
Control	Air over hydraulic, dual circuits
Drum diameter x lining	
Width	Front: 370 x 120mm Rear: 370 x 150mm
Air dryer	Equipped
ABS	Equipped
ASR (Anti Slip Regulator)	Equipped
Parking brake	Spring brake, acting on rear wheels
Exhaust brake	Electric-pneumatic with valve in exhaust pipe
Easy Start	Equipped

## AXLE LOAD & TYPE

Axle load limit	Front axle	5000kg
	Rear axle	9000kg
Front axle type	LF458 series Reversed Elliot, I-Beam	
Rear axle type	SH14 full-floating, single reduction, single speed hypoid	

## SUSPENSION

Front suspension Type	Semi-elliptic tapered leaf springs with shock absorbers & stabiliser
Size	1300 span x 70mm width
Rear suspension Type	Hendrickson HAS Air bag with shock absorbers

## WHEELS & TYRES

Wheel type	Eight-stud disc wheel (JIS type) PCD 285
Rim size	6.75 x 19.5 – offset 147mm
Tyre size	265/70R19.5 – 140/138
Number of tyres	Seven (including one spare)
Spare tyre carrier	Equipped

## FUEL TANK

Capacity	200L
Fuel pre-filter & sedimenter	Equipped
Fuel tank cap key	Equipped



# FE 1426 Air

## Cab, Instrumentation & Chassis


### CAB DETAILS

Type . . . . .	Forward control, all-steel construction with torsion bar tilt mechanism
Drivers SRS Airbag . . . . .	Equipped with pretensioner seatbelt
Seating capacity . . . . .	Three
Driver's seat . . . . .	ISRI 6800 with urethane foam pads, high-back, lumbar support, multi adjustable, air suspended, with integrated safety belt
Side passenger's seat . . . . .	Urethane foam pads, high-back & reclining seat with fabric cover & under-tray
Centre passenger's seat . . . . .	Urethane foam pads & foldaway type with seat back tray, fabric cover
Seat belt . . . . .	3-point type on driver's & side passenger's seat, 2-point type on centre passenger's seat
Sun visor and overhead console . . . . .	For driver & passenger sides
Windshield wipers . . . . .	Electric, dual, intermittent & 2-speed
Ventilator . . . . .	Forced type by electric blower
Rear view mirrors . . . . .	External: Heated & electric, two flat type, two convex spotters
Cigarette lighter 24V . . . . .	Equipped
Floor mat . . . . .	Vinyl type
Front air spoiler . . . . .	Equipped
Central locking & keyless entry . . . . .	Equipped with immobiliser
Heater and defroster . . . . .	Standard
Air conditioner . . . . .	Standard
Trim . . . . .	Full trim type (side, roof & back)
Cab pockets . . . . .	Equipped on both door sides
Power windows . . . . .	Equipped
Rest area . . . . .	Equipped
Car audio . . . . .	DAB AM/FM radio with CD & DVD player and Bluetooth
Speakers . . . . .	Driver & passenger sides
Foot rest . . . . .	Equipped
Easy Start . . . . .	Equipped
Engine control link . . . . .	Equipped
Cup holder . . . . .	Equipped
Cruise Control . . . . .	Equipped

### ELECTRICAL

Type . . . . .	24V, negative earth
Batteries . . . . .	12V x 2, series connection. Capacity 65Ah at 20-hour rate
Alternator type . . . . .	Brushless with built-in rectifier & voltage regulator. Capacity 24V, 60A
Starter type . . . . .	24V, 4.5kW
Headlamps . . . . .	Halogen type including fog lamps
High/low beam . . . . .	Equipped
Fluorescent reading lamp . . . . .	Equipped
Electric horn . . . . .	Equipped

### POWER & TORQUE CHART (ISO Net) J07E-TN

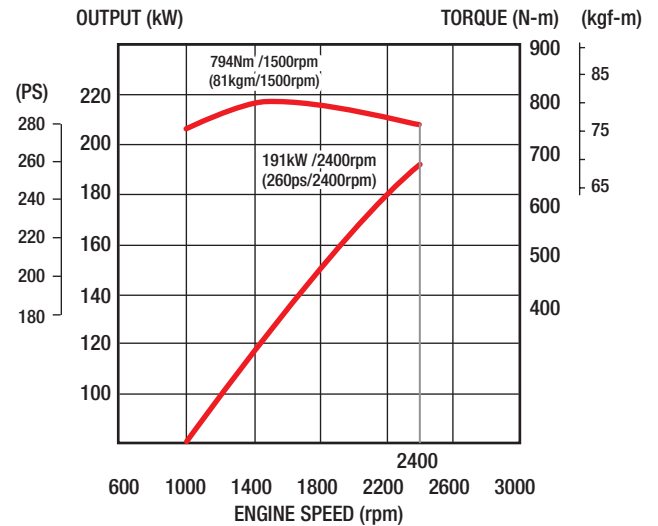

### INSTRUMENTS

- Meters & gauges**
  - Speedometer with trip meter
  - Odometer
  - Tachometer
  - Fuel gauge
  - Coolant temperature gauge
  - Air pressure gauge
- Switches**
  - One-key starting-stopping
  - Lighting switch
  - Directional indicator, dimmer & passing
  - Wiper & washer
  - Hazard lamp
  - Exhaust brake
  - Map lamp
  - Fog lamp
  - Easy Start
  - Cruise Control
  - DPR regeneration
  - ASR off
- Warning, pilot lamps & buzzers**
  - Mirror controls
  - Oil pressure lamp & buzzer
  - Air pressure lamp & buzzer
  - Engine over-run buzzer
  - Coolant level lamp & buzzer
  - Brake fluid lamp & buzzer
  - Brake adjustment lamp & buzzer
  - High beam indicator lamp
  - Turn signal indicator lamp
  - Parking brake indicator lamp
  - Seat belt lamp & buzzer
  - Exhaust brake indicator lamp
  - Engine control system lamp
  - Hazard indicator lamp
  - Back-up buzzer
- Others**
  - Idle up control knob
  - Horn button
  - 12V electric source

### STEERING

Type . . . . .	Telescopic and tilt steering column with locking device. Recirculating ball with Integral Power Steering
Gear ratio . . . . .	19:1
Steering angle . . . . .	<b>Inside:</b> 42° 30' - 45° 30' <b>Outside:</b> 35°


### CHASSIS FRAME

Type . . . . .	Ladder-shaped channel section side rails
Rear chassis width . . . . .	820mm
Main section (depth x flange x thickness) . . . . .	231.6 x 78 x 6.8mm
Inner section (depth x flange x thickness) . . . . .	218 x 60 x 3.2mm
Tensile strength . . . . .	Main: 540N/mm <sup>2</sup> {55kgf/mm <sup>2</sup> } Inner: 440N/mm <sup>2</sup> {45kgf/mm <sup>2</sup> }
Hooks . . . . .	Equipped for front & rear
Factory FUP . . . . .	Equipped



# FE 1426 Air

## Dimensions

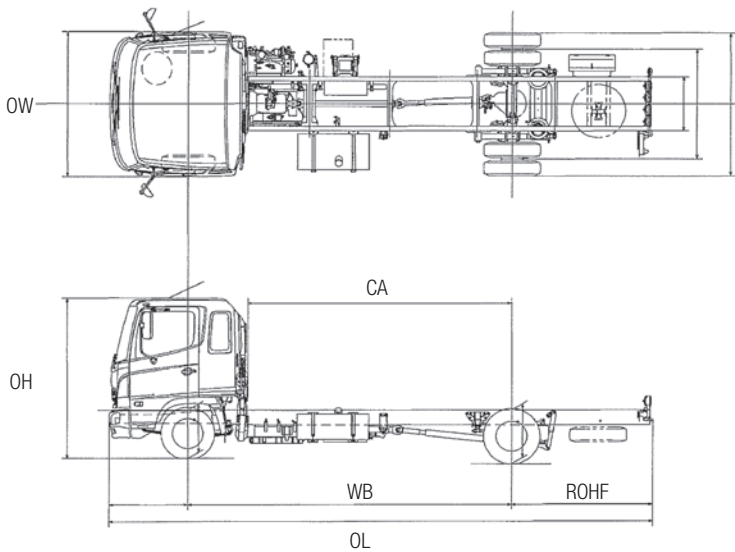

### DIMENSIONS - mm / Capacities

<b>Model</b> Hino FE 1426 Air . . . . .	Long . . . . .	X Long
Production code . . . . .	FE7JLMG-QAU . . . . .	FE7JPMG-QAU
Wheelbase (WB) . . . . .	4850 . . . . .	5500
Overall length (OL) . . . . .	8135 . . . . .	9145
Overall width (OW) . . . . .	2240 . . . . .	2240
Overall height (OH) . . . . .	2490 . . . . .	2490
Cab to rear axle centre (CA) . . . . .	3950 . . . . .	4600
Rear overhang at frame end (ROHF) . . . . .	2060 . . . . .	2420
Front chassis height (HF) . . . . .	.815 . . . . .	815
Rear chassis height (HR) . . . . .	.840 . . . . .	840
Road clearance (at diff. case) (RC) . . . . .	.190 . . . . .	190
Front track (FT) . . . . .	1760 . . . . .	1760
Rear track (RT) . . . . .	1690 . . . . .	1690
Turning circle kerb to kerb . . . . .	16,800 . . . . .	18,800
Turning circle wall to wall . . . . .	18,200 . . . . .	20,200
<b>Chassis mass – kg</b> (standard tools, 10 litres of fuel, without spare tyre)		
Total . . . . .	3670 . . . . .	3770
Front . . . . .	2380 . . . . .	2420
Rear . . . . .	1290 . . . . .	1345
GVM* . . . . .	14,000 . . . . .	14,000
GCM . . . . .	22,000 . . . . .	22,000

\*Optional 12,000kg GVM available on application.

### GENUINE ACCESSORY OPTIONS

Bull bar	Side skirts
Chrome wheel covers	Stoneguard
Sat Nav	Sunvisor
Rear vision camera (up to 3)	Timber dash panel
Roof scoop	Engine driven PTO 1:1.08 step-up

**Please check with your dealer for price, availability & fitment for these options**

### WARRANTY

New vehicle warranty period

Medium Duty Model	Axle configuration	Standard warranty <small>(whichever comes first)</small>	Cab corrosion perforation
<b>500 FE 1426 Air</b>	<b>4 x 2</b>	<b>3 years or 150,000km</b>	<b>36 months</b>

Battery warranty – 12 months from date of delivery

Genuine parts or accessories warranty – 3 years unlimited kilometres when fitted by an authorised Hino dealer \*

\* For conditions, refer to the Hino Parts & Service warranty brochure

### DISCLAIMER

Important notice. Hino Trucks are distributed in Australia by Hino Motor Sales Australia Pty Ltd A.C.N. 064 989 724.

All efforts have been made to ensure the information contained in this brochure was correct at time of printing or uploading. Hino Motor Sales Australia Pty Ltd reserves the right to alter any details of the specifications and equipment without notice. Hino in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance placed by any person on anything contained in this brochure. You should therefore check with your authorised Hino dealer at the time of ordering your motor vehicle to ensure that colour, specifications, equipment, design features and options are available for the vehicle you are ordering. Please note that some options may only be available in combination with others. Authorised Hino dealers will on request provide up to date information on all accessories, design features, prices and availability.