

716 Auto
716 Hybrid
717 Manual



ADR 80/03 Model
Wide Cab 4 x 2 Cab Chassis

KEY SPECIFICATIONS

GVM.	6,500kg, optional 4,495kg
GCM.	7,300kg to 10,000kg
Power	110kW (150 HP) (Auto & Hybrid)
	121kW (165 HP) (Manual)
Torque	420Nm (Auto & Hybrid)
	464Nm (Manual)
Wheelbases	3,430mm, 3,870mm
Max Nominal Body Length	4,840mm, 5,550mm



716 Auto 716 Hybrid 717 Manual

Engine & Driveline specifications

DIESEL ENGINE

Engine transmission combination	716 Auto	716 Hybrid	717 Manual
Engine model	N04C US	N04C UR	N04C UT
Max output (ISO Net) @ 2,500 RPM	110kW/150 HP		121kW/165 HP
Max torque (ISO Net) @ 1,400 RPM	420Nm/42.8 kgf/m		464Nm/47.3 kgf/m
Maximum engine speed	3,100 RPM		
Type	Diesel, four cycle, four-cylinder in line, overhead valve, water cooled		
Combustion system	Direct injection type		
Bore & stroke	104 x 118mm		
Piston displacement	4.009 litres		
Fuel injection system	Electronic control, common rail type		
Air intake system	Turbo-intercooled, stack-type air intake		
Air cleaner	Paper element		
Fan clutch	Equipped		
Exhaust system	Catalytic Convertor with Diesel Particulate Active Reduction System (DPR)		
Exhaust outlet	Horizontal		
Emission control system	EGR & DPR meeting ADR 80/03 using Euro 5 Also meets EEV emission levels		

HYBRID DRIVE SYSTEM

Motor type	AC Synchronous motor
Rated voltage	300V
Max output	36kW
Max torque	333Nm
Idle stop	Equipped
Battery type	Nickel-metal hydride
Battery capacity	288V/6.5Ah

CLUTCH

	Hybrid	Manual
Clutch type	Dry single plate, diaphragm type with damper springs	
Facing outside diameter	300mm	325mm
Facing lining area	423 x 2cm ²	483 x 2cm ²
Control	Electronic with transmission	Hydraulic with vacuum booster

TRANSMISSION

	716 Auto	716 Hybrid	717 Manual
Model	A860E	M550 ProShift 5	MZZ6F
Description	Full Automatic	Automated Manual	Manual
Number of forward gears	6	5	6
Type	Double Overdrive	Single Overdrive	Single Overdrive

BRAKES

Service brakes	Hydraulic system with ventilated disc brakes front and rear
Control	Vacuum servo with hydraulic assist & dual circuits
Front disc diameter	287mm
Rear disc diameter	287mm
Anti-lock system (ABS)	Equipped
Vehicle Stability Control (VSC)	Equipped
Traction Control (TC)	Equipped
Easy Start system (ES)	Equipped (except auto)
Exhaust brake	Electric-vacuum actuator with valve in exhaust pipe
Park brake	Drum on the rear of transmission

PERFORMANCE & GEAR RATIOS

Models	716 Auto	716 Hybrid	717 Manual
Engine RPM @ 100km/h	2,160	2,250	2,390
Maximum speed (km/h)	138	134	126
Gradeability tan θ % @ GVM	60	37.4	57.4
Final drive ratio	4.875:1	4.333:1	4.333:1
Transmission Gear Ratios	1st	3.743	4.981
	2nd	2.003	2.911
	3rd	1.343	1.556
	4th	1.000	1.000
	5th	0.773	0.738
	6th	0.634	0.782
	Rev	3.697	4.625
	Torque convertor ratio	1.95:1	

AXLE, SUSPENSION & LOAD LIMITS

FRONT	Front Axle Model & Type	Reverse Elliot I-Beam	
	Suspension	Tapered leaf springs with shock absorbers & stabiliser	
	Spring Dimensions	1,250 x 70mm	
	Number of Leafs	3	
	Spring Rate	14.8kgf/mm	
	Axle Limit (including suspension) (kg)	3,100	
Tyre Limit (kg)		2,570	
REAR	Rear Axle Model & Type	SH12, fully floating, single reduction, single speed by Hypoid gears	
	Suspension	Main & Aux Tapered leaf with shock absorber & stabiliser	
	Spring	Main	Auxiliary
	Dimensions	1,300 x 70mm	900 x 70mm
	Spring Rates	19kgf/mm	62kgf/mm
	Number of Leafs	3	2
	Axle Limit (including suspension) (kg)	5,100	
	Tyre Limit (kg)	4,860	

WHEEL & TYRES

Wheel type	6-stud disc wheel
Wheel & rim size	205/85R16 117/115 & 16x5.5K-113mm
Number of tyres	Seven including spare
Spare tyre carrier	Equipped

ELECTRICAL (CAB & CHASSIS)

Type	24 volt, negative earth
Batteries	12V x 2, series connected
Charging (80 amp)	Alternator with built in rectifier (Auto & Manual)
 Supplied by Hybrid System (Hybrid)
Starter	24V, 4.5kW starter motor (Auto & Manual)
 Supplied by Hybrid System (Hybrid)



716 Auto 716 Hybrid 717 Manual

Cab equipment & Instrumentation

CHASSIS FRAME

Wheelbase	Medium	Long
Type	Ladder-shaped channel section side rails	
Chassis width at rear	750mm	
Main section in mm (depth x flange x thickness)	192.8 x 65 x 5.9mm	
Tensile strength	540N/mm ²	
Tow hook (front & rear)	Equipped	
Front bumper	Painted in cab colour	


CAB EXTERIOR

Type	Forward control, all steel welded construction, torsion-bar tilt mechanism, fully trimmed
Windscreen wipers	Electric, dual wipers, intermittent and 2-speed
Outside rear mirrors	Remote control & heated
Radiator grille	Painted same colour as cabin
Headlamp	HID with washer & fog lamp (Hybrid) Halogen & fog lamp (Auto & Manual)

CAB INTERIOR

Steering	Telescopic tilt column with integral power steering
Windscreen glass	Laminated glass
Seating capacity	Three
Driver's seat	4-way adjustable, urethane foam pads, high-back, lumbar support with suspension base
Assistant's seat	Fixed bench, urethane foam pads, high-back seat
Seat cover	Fabric cover
Seat belts	
Driver's seat	3-point type with ELR and pre-tensioner
Assistant's seat	3-point type with ELR and pre-tensioner
Centre passenger's seat	2-point type
Sun visors	For driver and passenger
Ventilator	Forced type by electric blower
Inside rear mirror	One, flat type
Cigarette lighter (24 volt)	Equipped
Audio Visual Unit	DAB+ AM/FM radio with CD&DVD player & Bluetooth & Rear View Camera
Heater and defroster	Equipped
Air conditioner	Equipped
Remote door locking	Equipped
Immobiliser	Equipped
Power windows	Equipped
SRS airbag	Equipped for driver and left side passenger
Drivers foot rest	Equipped (Auto models only)
Seat back console	Equipped (centre)
Overhead consoles	For driver and assistant
Cup holder	Equipped
Cruise control	Equipped

POWER & TORQUE CHART (ISO Net) N04C US/UR & UT

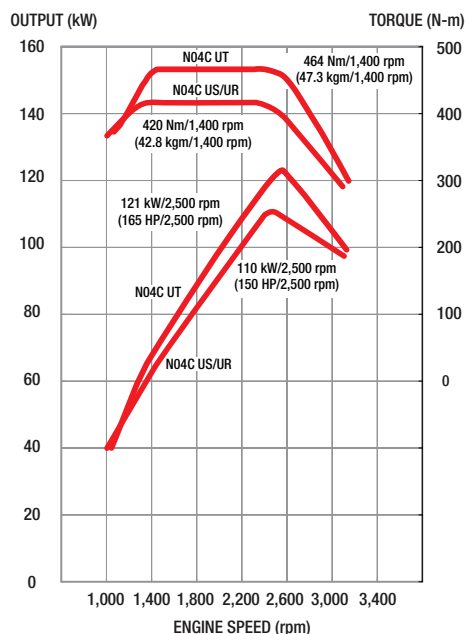

INSTRUMENTS

- Meters and gauges**
 - km-kg system
 - Engine tachometer
 - Hybrid battery status (hybrid only)
- Warning, pilot lamps and buzzers**
 - Turning signal & hazard indicator lamp
 - Exhaust brake indicator lamp
 - Engine oil pressure warning lamp
 - Battery charge warning lamp
 - High beam indicator lamp
 - Parking brake indicator lamp
 - Engine malfunction indicator lamp
 - Fuel level warning lamp
 - Fuel filter water accumulating level warning lamp
 - Brake fluid level warning lamp
 - Back-up warning buzzer
 - Cab-tilt warning lamp
 - ABS system failure warning lamp
 - SRS airbag system failure warning lamp
 - Easy Start indicator lamp (except auto)
 - Cruise Control
 - Hybrid system lamp (hybrid only)
- Switches**
 - AMT system lamp (hybrid only)
 - Lighting switch
 - Wiper and washer switch
 - Exhaust brake switch
 - Easy Start switch (except auto)
 - Easy Start release timing adjuster switch (except auto)
 - Cruise Control
 - Traction Control OFF
- Multi Information Display**
 - Fuel gauge
 - Coolant temperature gauge
 - DPR accumulation gauge
 - Odometer
 - 2 trip meters
 - Fuel consumption
 - Current
 - Average
- Others**
 - One-key starting-stopping
 - Horn button
 - Remote door locking

STEERING

Type	Telescopic and tilt steering column with locking device. Recirculating ball with integral power steering.
Steering angle	Inside: 50° Outside: 36°

GENUINE ACCESSORY OPTIONS

Bull bar	LED driving lights
Chrome wheel covers	Stoneguard
GPS sat nav	Sunvisor
Rear vision camera (Up to 2 extra)	




Please check with your dealer for price, availability & fitment for these options



716 Auto 716 Hybrid 717 Manual

300 Series

Dimensions

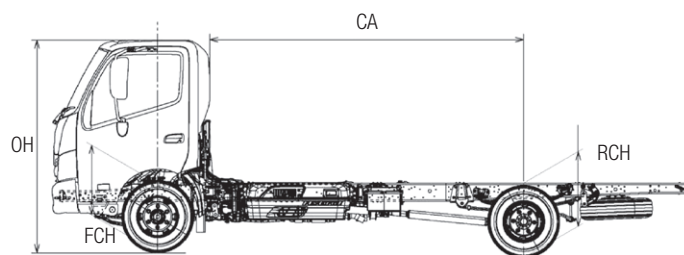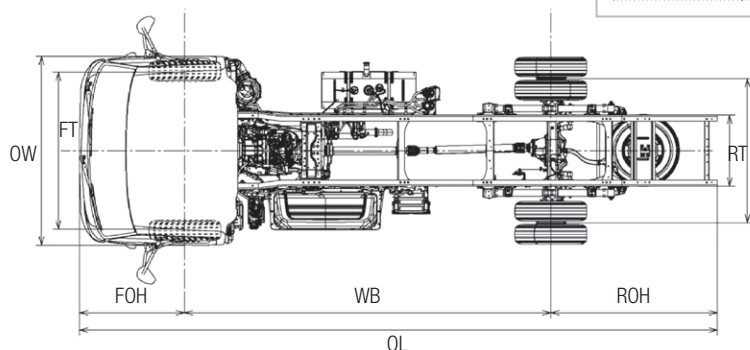

Drawings are for reference only to the table. For specific chassis layouts please refer to Body Mounting Manual drawings.

DIMENSIONS – mm / Capacities

Models 300 Variants	716 Auto Medium	716 Hybrid ProShift 5 Medium	716 Hybrid ProShift 5 Long	717 Manual Medium	717 Manual Long
Model Code	XZU710R-HKTQSQ3	XKU710R-HKUQSQ3	XKU720R-HKUQSQ3	XZU710R-HKFQTQ3	XZU720R-HKFMTQ3
Nominal Body Length (WBx.6)+CA-80	4,840	4,840	5,550	4,840	5,550
Wheelbase (WB)	3,430	3,430	3,870	3,430	3,870
Overall Length (OL)	6,185	6,185	6,735	6,185	6,735
Overall Width (OW)	1,995	1,995	1,995	1,995	1,995
Overall Height (OH)	2,205	2,205	2,200	2,205	2,190
Cab to Rear Axle Centre (CA)	2,870	2,870	3,310	2,870	3,310
Front Overhang (FOH)	1,110	1,110	1,110	1,110	1,110
Rear Overhang (ROH)	1,645	1,645	1,760	1,645	1,760
Front Chassis Height (FCH)	695	695	690	695	695
Rear Chassis Height (RCH)	760	755	760	760	760
Road Clearance (RC)	180	180	180	180	180
Front Track (FT)	1,665	1,665	1,665	1,665	1,665
Rear Track (RT)	1,520	1,520	1,520	1,520	1,520
Turning Circle Kerb to Kerb	11,600	11,600	12,800	11,600	12,800
Wall to Wall	13,000	13,000	14,200	13,000	14,200
Locking Fuel Tank Capacity (Lts)	170	100	100	170	170
Indicative chassis mass – kg (standard tools, 10 litres of fuel, spare tyre and subject to a +/- 3% tolerance)					
Total	2,375	2,520	2,530	2,365	2,380
Front	1,635	1,700	1,725	1,635	1,645
Rear	740	820	805	730	730
GVM STD	6,500	6,500	6,500	6,500	6,500
GVM Opt	4,495	4,495	4,495	4,495	4,495
GCM STD	7,300	10,000	10,000	10,000	10,000
GCM Opt	7,300	7,995	7,995	7,995	7,995

WARRANTY

New vehicle warranty period

Light Duty Model	Axle configuration	Standard warranty (whichever comes first)	Cab corrosion perforation	Hybrid Nickel metal Hydride Battery (whichever comes first)
300 716 & 717	4 x 2	3 years or 100,000km	36 months	5 years or 160,000km

Battery warranty – 12 months from date of delivery

Genuine parts or accessories warranty – 3 years unlimited kilometres when fitted by an authorised Hino dealer *

* For conditions, refer to the Hino Parts & Service warranty brochure



DISCLAIMER

Important notice. Hino Trucks are distributed in Australia by Hino Motor Sales Australia Pty Ltd A.C.N. 064 989 724.

All efforts have been made to ensure the information contained in this brochure was correct at time of printing or uploading. Hino Motor Sales Australia Pty Ltd reserves the right to alter any details of the specifications & equipment without notice. Hino in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance placed by any person on anything contained in this brochure. You should therefore check with your authorised Hino dealer at the time of ordering your motor vehicle to ensure that colour, specifications, equipment, design features & options are available for the vehicle you are ordering. Please note that some options may only be available in combination with others. Authorised Hino dealers will on request provide up to date information on all accessories, design features, prices & availability.

HS300716/717-1016