

# HINO

## 500 Series

# FM 2632 Auto

# FM 2635 Manual



\* Illustration may contain items not standard to the model

### ADR 80/03 Model

### 6 x 4 Cab Chassis

## KEY FEATURES

- Vehicle Stability Control (VSC) with ASR
- Polished Aluminium Wheels
- Cruise Control
- Hino Stop Start System (HSS) (Manual models only)
- Engine Retarder Brake
- Reverse Camera
- Easy Start (ES) Take off assist (Manual models Only)
- Drivers SRS Airbag
- Heated & Electrically Operated External Mirrors
- ISRI 6860/870 Drivers seat with integrated Safety Belt
- ECE R-29 Cab Strength Certified
- Leaf and Air with ECAS Rear suspension variants
- Differential Cross Locks

## KEY SPECIFICATIONS

<b>Models</b>	. . . . . FM 2632	. . . . . FM 2635
<b>GVM</b>	. . . . . 26,000kg	. . . . . 26,000kg
<b>GCM</b>	. . . . . 36,500kg	. . . . . 45,000kg
<b>Power</b>	. . . . . 320hp/235kW	. . . . . 350hp/257kW
<b>Torque</b>	. . . . . 1,275Nm	. . . . . 1,422Nm
<b>Transmissions</b>	. . . . . Six-speed	. . . . . Nine-speed
	. . . . . Allison Automatic	. . . . . Synchromesh Manual
<b>Nominal Wheelbases</b>	. . . . . 4.1m, 5.2m, 6.4m	
<b>Max. Nominal Body Length<sup>#</sup></b>	. . . . . 5.7m, 7.5m, 9.2m	

## ENGINE

Model	FM 2632	FM 2635
Engine Model	A09C-US	A09C-UR
Max. Output (ISO Net) @ 1,800 RPM	320hp/235kW	350hp/257kW
Max. Torque (ISO Net) @ 1,100 RPM	1,275Nm	1,422Nm
Max. Engine Speed	2,100 RPM	
Engine Compliance	ADR 80/03 using Euro 5 STD	
Type	Turbocharged & Intercooled, 6 cylinder in-line, overhead camshaft & fluid cooled	
Combustion System	Direct Injection	
Bore & Stroke	112 x 150mm	
Piston Displacement	8.866L	
Compression Ratio	17.0:1	
Engine Oil Capacity	31.5L	
Coolant Fluid Capacity	Auto: 29.6L	
	Manual: 29.5L	
Fuel Injection System	Electronic control common-rail type	
Air Intake System	Stack-type	
Air Cleaner	Dual paper elements	
Air Compressor	Single cylinder, fluid cooled	
	85 x 60mm	
Fan Clutch	Equipped	
Exhaust	Horizontal	
Emission Control System	Selective Catalytic Reduction (SCR)	
Hino Stop Start System (HSSS)	Manual models only	
Engine Immobilizer	Equipped	

## CLUTCH (MANUAL MODELS ONLY)

Model	CSP-430
Type	Dry single plate with damper springs
Facing material	Organic
Facing outside diameter	430mm
Control	Hydraulic with air booster

## TRANSMISSION & GEAR RATIOS

Make & Description	Automatic		Manual	
	Allison 3200 series 6 speed with Electronic Control		Hino MO09 OD 9 speed with Cable Control	
Type	Double Overdrive		Overdrive	
Gear Ratios	1	3.487	1	10.178
	2	1.864	2	6.986
	3	1.409	3	5.063
	4	1.000	4	3.636
	5	0.750	5	2.633
	6	0.653	6	1.921
	Rev	5.027	7	1.392
			8	1.000
		9	0.724	
		Rev	9.874	
Torque convertor & Ratio	TC 421	1.77		

## PERFORMANCE

Calculations based on 26.0 t GVM with 11R22.5 drive tyres			
Transmission	Automatic	Manual	
Wheelbase variants	M, L & XXL	L & XXL	M
Rear Axle Ratio	5.857	4.875	5.250
Engine RPM @ 100 km/h	2,010	1,850	2,000
Max theoretical speed (km/h)	104	114	106
Gradeability tan $\theta$ (%) @ GVM	33.8	60	60
Speed limited to (km/h)	100		

## BRAKES

Type	Full Air, dual circuit, "S"cam
Drum & Lining sizes	Front : 410 x 150mm
Diameter x Width	Rear : 410 x 220mm
Auto adjusters	Equipped
Vehicle Stability Control (VSC)	Equipped
Anti-lock Braking System (ABS)	Equipped
Anti-Slip Regulator (ASR)	Equipped
Air Dryer	Equipped
Easy Start (ES)	Manual models only
Park Brake	Spring Brake acting on FA & FR axles
Engine Retarder Brake	Equipped

## AXLE, SUSPENSION & LOAD LIMITS

FRONT	Front Axle Model	MF 78IR	
	Type	I-Beam, Reverse Elliot	
	Suspension	Taper leaf springs with shock absorbers	
	Spring Dimensions	1,700 x 90 x 28.8mm x 1	
	Length x Width x Thickness x Number	1,700 x 70 x 30.3mm x 1	
	Spring Rate	32.8 kgf/mm	
	Axle Limit (including suspension)	6,500 kg	
	Tyre Limit	6,900 kg	
REAR	Rear Axle Model	THD17 & SH17	
	Differential Cross Lock	Equipped FR & RR	
	Inter-axle Differential Lock	Equipped	
	Type	Fully floating, single reduction, hypoid	
	Rear suspension types	Hino 6 Rod Leaf	Hendrickson Air
	Suspension	Semi-elliptic Multi Leaf	HAS 460 airbag with double acting shock absorbers and ECAS remote height control system
		Medium Long & XXL Long	
	Spring Dimensions	1,350 x 90 x 20 x 6	Road Friendly Suspension Rating N/o 2005
	Length x Width x Thickness x Number	1,350 x 90 x 18 x 3	
	Spring Rate	293.4 kgf/mm	234.0 kgf/mm
Axle Limit (including suspension)	20,000 kg		
Tyre Limit	21,800 kg		

## WHEELS & TYRES

Material	Polished Aluminium
Wheel type	10-stud disc (ISO) 335 PCD
Rim size (in)	22.5 x 8.25
Tyre size	Front: 295/80R22.5 152/148
	Rear: 11R22.5 148/145
Number of tyres	11
Spare Tyre Carrier	Equipped (Except for M wheelbase)

## FUEL TANK

Wheelbases	M	L & XXL
Material	Steel	Aluminium
Capacity	200L	390L
Lockable cap	Equipped	
Pre Filter & sedimenter	Equipped	
AdBlue® tank capacity	59L	

## STEERING

Type	Telescopic & tilt steering column with locking device. Recirculating ball with internal Power Steering
Steering Angles	Inner 49°
	Outer 34°

## CAB DETAILS


Type	Forward control, all-steel construction mounted on full floating coil spring suspension with electro hydraulic tilt mechanism
ECE R-29 Cab strength	Compliant
Drivers SRS Airbag	Equipped
Seating capacity	Three
Driver's seat	ISRI 6860/870 with urethane foam pads, high-back, lumbar support, multi adjustable, air suspended, with integrated safety belt
Side passenger's seat	Urethane foam pads, high-back & reclining seat with fabric cover, air suspension
Centre passenger's seat	Urethane foam pads & foldaway type with seat back tray, fabric cover
Seat belt	3-point type on driver's & side passenger's seat 2-point type on centre passenger seat
Sun visor and overhead console	For driver & passenger sides
Windshield wipers	Electric, dual, intermittent & 2-speed
Ventilator	Forced type by electric blower
Rear view mirrors	External: Electric Control & heated flat type, Convex spotters both sides and Left side kerb view
12V/120w Socket	Equipped
Floor mat	Vinyl type
Central locking & keyless entry	Equipped with immobiliser
Heater and defroster	Standard
Air conditioner	Standard
Trim	Full trim type (side, roof & back)
Cab pockets	Equipped on both door sides
Power windows	Equipped
Rest area	Equipped
Multi media system	6.5" LCD, HD touch screen display with DAB+ AM/FM radio, AAUX input, Bluetooth® 4.a, Android 6.0 CANBUS connection and Wi-Fi enabled
Speakers	Driver & passenger
Foot rest	Equipped
Easy Start	Manual Models only
Cup holders	Equipped
Cruise control	Equipped
Reverse camera	Equipped

## ELECTRICAL

Type	24V, negative earth
Batteries	12V x 2, series connection, 120 Ah
Alternator Type	Brushless, with built-in regulator
Capacity	24V, 90 Amp
Starter Type	24V, 6.0 kW
Headlamps	Halogen type with manual levelling
High/low beam	Equipped
LED Fog Lamps (white)	Equipped
Fluorescent Reading Lamp	Equipped
Electric air horn	Equipped

## POWER & TORQUE CHART (ISO NET) A09CUS & A09CUR

A09C-US/A09C-UR

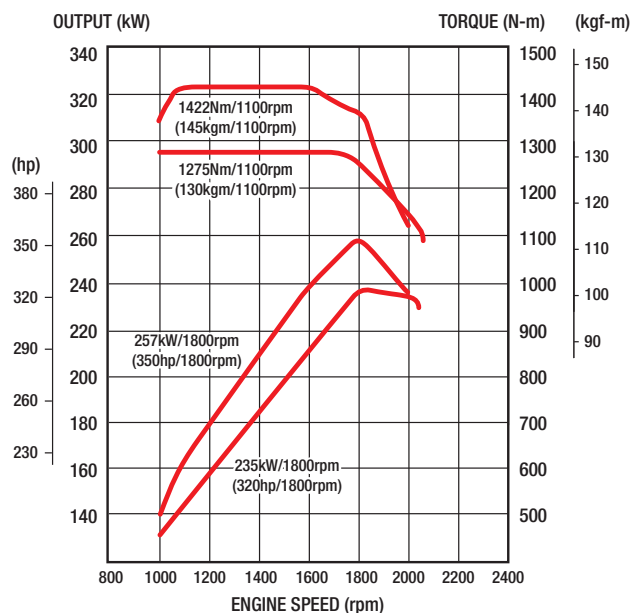

## INSTRUMENTS

<b>Meters</b>	<b>Additional Switches &amp; Controls</b>
Speedometer	External flat mirror Control
Tachometer	Easy Start Rate Control (Manual models only)
<b>LCD Gauges</b>	Idle up Control
Air pressure (2)	Quick warm up switch
Fuel	VSC/ASR off switch
AdBlue®	Hino Stop Start System off switch (Manual models only)
Engine Temperature	Eco Run (Manual models only)
Odometer plus trip meter	Headlight Levelling
<b>Multi Information Display (MID)</b>	Fog Lamp
Fuel Consumption	ECAS remote (air bag models)
Service reminders	Inter-axle & Differential Cross Locks
Warnings	Engine Retarder Brake
Faults	

## CHASSIS FRAME

Wheelbase variants	M & L	XXL
Type	Ladder-shaped channel section side rails with Grid hole design	
Chassis outer width (at rear)	840mm	
Main section (mm)	298 x 80 x 7.0	300 x 80 x 8.0
Depth x flange x Thickness)		
Tensile strength	620 N/mm <sup>2</sup> (63 kgf/mm <sup>2</sup> )	
Front Underrun Protection (FUP)	Equipped	
Front and rear tow hook	Equipped	

## GENUINE ACCESSORY OPTIONS

Bull bar	GPS Satellite Navigation
Stoneguard	External Vision Cameras (additional 3)
Sunvisor	LED Driving Lights
Seat covers	Hino Traq (Telematics)
Floor mats	Engine driven PTO
Dash mats	1:1 ratio
Weather shields	

Please check with your dealer for price, availability & fitment for these options


# FM 2632 Auto FM 2635 Manual

# 500 Series

## DIMENSIONS – MM/CAPACITIES

Model	FM 2632						FM 2635		
	MEDIUM	MEDIUM	LONG	LONG	XXLONG	XXLONG	MEDIUM	XXLONG	XXLONG
Wheelbase variant									
Transmission	AUTO						MANUAL		
Suspension	LEAF	AIR	LEAF	AIR	LEAF	AIR	AIR	LEAF	AIR
Model Code	FM1AL1M-RHU	FM1AL1U-RHU	FM1AR1A-RHU	FM1AR1G-RHU	FM1AW1A-RHU	FM1AW1G-RHU	FM1AL1U-SHU	FM1AW1A-SHU	FM1AW1G-SHU
Wheelbase (WB)	4,155	4,160	5,205	5,210	6,405	6,410	4,160	6,405	6,410
Axles Spread (AS)	1,350	1,330	1,350	1,330	1,350		1,330		
Max Nominal Body length # (WB x 0.6(up to 3.7) + CA – 80)	5,713	5,721	7,518	7,526	9,295	9,300	5,846	9,295	9,300
Overall Length (OL)	7,845		9,295		11,245		7,845	11,245	
Overall Width (OW)					2,490				
Overall Height (OH)	2,905				2,900		2,905	2,895	
Cab to Rear Axle Centre (CA)	3,300	3,305	4,475	4,480	5,675	5,680	3,430	5,675	5,680
Front Overhang (FOH)					1,380				
Rear Overhang (ROH)	2,250	2,245	2,650	2,645	3,400	3,395	2,245	3,400	3,395
Front Chassis Height (FCH)	1,025				1,020		1,025	1,015	
Rear Chassis Height (RCH)	1,070	1,045	1,070	1,045	1,070	1,045	1,045	1,070	1,045
Road Clearance (RC)					250				
Front Track (FT)					2,050				
Rear Track (RT)	1,855	1,840	1,855	1,840	1,855	1,840	1,840	1,855	1,840
Turning Circle Kerb to Kerb	15,400		18,600		22,400		15,400	22,400	
Wall to Wall	17,000		20,200		24,000		17,000	24,000	
Indicative Chassis Mass – kg (10 litres of fuel & spare tyre and subject to ± 3% Tolerance)									
Total	7,496	7,048	7,572	7,182	7,777	7,392	7,083	7,867	7,487
Front	3,798	3,780	3,832	3,828	3,916	3,917	3,800	3,991	3,997
Rear	3,698	3,268	3,740	3,354	3,861	3,475	3,283	3,876	3,490
GVM					26,000				
GCM					36,500		45,000		

# ROH may need to be extended to suit body length and rear overhang is limited to 3.7 m

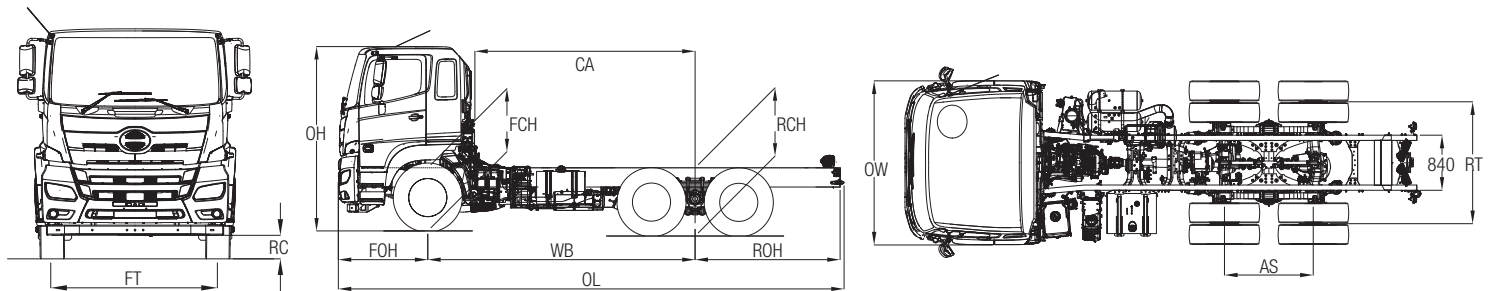

## WARRANTY

New vehicle warranty period

Medium Duty Model	Axle configuration	Standard warranty (whichever comes first)	Cab corrosion perforation
500 FM 2632 & FM 2635	6 x 4	3 years or 200,000km	36 months

Battery warranty – 12 months from date of delivery

Genuine parts or accessories warranty – 3 years unlimited kilometres when fitted by an authorised Hino dealer \*

\* For conditions, refer to the Hino Parts & Service warranty brochure



## DISCLAIMER

Important notice. Hino Trucks are distributed in Australia by Hino Motor Sales Australia Pty Ltd A.C.N. 064 989 724. All efforts have been made to ensure the information contained in this brochure was correct at time of printing or uploading. Hino Motor Sales Australia Pty Ltd reserves the right to alter any details of the specifications & equipment without notice. Hino in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance placed by any person on anything contained in this brochure. You should therefore check with your authorised Hino dealer at the time of ordering your motor vehicle to ensure that colour, specifications, equipment, design features & options are available for the vehicle you are ordering. Please note that some options may only be available in combination with others. Authorised Hino dealers will on request provide up to date information on all accessories, design features, prices & availability.