

HINO

500 Series

FD 1124 Crew

FE 1424 Crew



*Image may contain items not standard to the model

4 x 2 Crew Cab Chassis

KEY FEATURES

Vehicle Stability Control (VSC) – Including ABS & TC
 Pre-Collision System (PCS) – Including SE, AEB & PD
 Lane Departure Warning System (LDWS)
 Adaptive Cruise Control (ACC)**
 Engine Retarder Brake (Jake brake)
 Reverse Camera
 LED headlamps with integrated LED daytime running lamps
 Drivers SRS Airbag
 ISRI 6860 NTS2 Driver and front passenger seat with integrated safety belt
 ECE-R29 Cab Strength Certified
 post Post New Long Term (pPNLT)
 (Euro 6 equivalent emissions)
 Hino Connect Telematics

KEY SPECIFICATIONS

	FD 1124 Crew	FE 1424 Crew
GVM	11,000kg	14,000kg
	8,000kg Option	12,000kg Option
GCM	20,000kg	21,000kg
Power	240hp/177kW	240hp/177kW
Torque	794Nm	833Nm
Transmissions	6 speed Automatic	6 speed Automatic
Wheelbases	5.5m	5.5m
Max Nominal Body Length	7.1m	7.1m

ENGINE

	FD 1124 Crew	FE 1424 Crew
Model	Hino A05C-TE	Hino A05C-TD
Max. output (ISO NET) @ 2,300RPM	240hp/177kW	
Max. torque (ISO NET) @ 1,400RPM	794Nm	833Nm
Max. engine RPM	2550RPM	
Engine compliance	ADR 80/03 using Japan pPNLT	
Type	Diesel, turbocharged & intercooled 4 cylinder with overhead camshaft	
Combustion system	Direct injection with EGR	
Bore & stroke	112 x 130mm	
Piston displacement	5.123L	
Compression ratio	17.5:1	
Fuel injection	Electronic control common rail	
Air compressor / bore & stroke	Single cylinder / 70 x 40mm	
Air cleaner	Dual paper elements	
Exhaust	Horizontal outlet RHS	
Emission Control System	DPR & SCR (AdBlue®)	
Engine Immobiliser	Equipped	

TRANSMISSION & GEAR RATIOS

Make and description		FD 1124 Crew	FE 1424 Crew
		Automatic	Automatic
		Allison 2500, 6 speed	Allison 2500, 6 speed
Type		DOD	DOD
Gear Ratios	1	3.512	3.512
	2	1.896	1.896
	3	1.439	1.439
	4	1.000	1.000
	5	0.737	0.737
	6	0.643	0.643
	Reverse	5.086	5.086
Torque convertor & ratio	TC222	1.58	1.58
Rear axle ratio		4.333	4.875
PTO option/Torque capacity		339Nm	339Nm


PERFORMANCE

Model	FD 1124 Crew	FE 1424 Crew
GVM calculations are based on	11,000kg	14,000kg
Tyre size	235/75R17.5	265/70R19.5
Transmission	Auto	Auto
Engine RPM @ 100km/h	1,922	1,970
Max theoretical speed (km/h)	134	129
Gradeability tan (%) @ GVM	45.5	37.8
Speed limiter to (km/h)	N/A	100

BRAKES

Model	FD 1124 Crew	FE 1424 Crew	
Type	Drum brakes front and rear		
Control	Air Over Hydraulic (AOH), Dual circuit		
Drum diameter x lining width	Front	320 x 110mm	370 x 120mm
	Rear	320 x 120mm	370 x 150mm
Air Dryer	Equipped		
Vehicle Stability Control (VSC)	Equipped		
Pre-Collision System (PCS)	Equipped		
Anti-lock Brake System (ABS)	Equipped		
Traction Control (TC)	Equipped		
Park brake	Spring brake acting on rear wheels		
Exhaust & engine brake (Jake Brake)	Equipped		

POWER & TORQUE CHART (ISO Net) A05C-TE AND A05C-TD

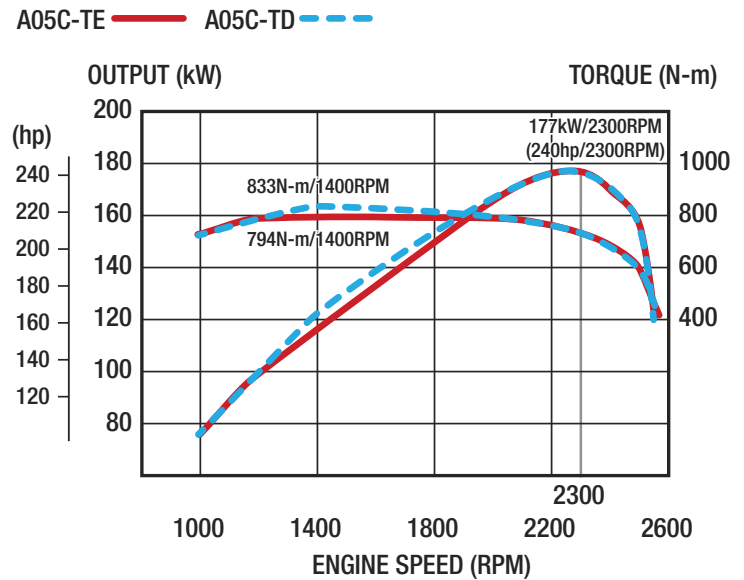

SAFETY FEATURES

Active Safety Features		
Vehicle Stability Control	VSC	Equipped
Anti-lock Brake System	ABS	Equipped
Pre-Collision System	PCS	Equipped
PCS is inclusive of	Safety Eye	SE
	Autonomous Emergency Braking	AEB
	Pedestrian Detection	PD
Traction Control	TC	Equipped
Lane Departure Warning System	LDWS	Equipped
Staggering Warning	SW	Equipped
Adaptive Cruise Control	ACC	Equipped
Reverse Camera	RC	Equipped
Passive Safety Features		
SRS airbag for driver		Equipped
SRS Seat belt pretensioner for driver		Equipped
Front Underrun Protection device (FUPD)		Equipped
ECE-R29 Cab Strength Certified		Equipped

SUSPENSION & LOAD LIMITS

Model	FD 1124 Crew	FE 1424 Crew			
FRONT	Front axle model	LF 456	LF 451		
	Front axle type	I-Beam, reverse elliptical			
	Suspension	Taper leaf springs with shock absorbers and stabiliser			
	Spring Dimensions	1300 x 70mm			
	Number	3	4		
	Spring rate (kgf/mm ²)	23.0	27.0		
	Axle limit (including suspension)	4,100kg	5,000kg		
Tyre limit	4,000kg	5,000kg			
REAR	Rear axle model	SH13	SH14		
	Rear axle type	Fully floating, single reduction by hypoid gears			
	Rear suspension types	Leaf	Leaf		
	Suspension description	Multi leaf main and auxiliary with shock absorbers	Taper leaf main and auxiliary with shock absorbers		
	Spring dimensions	Main	Auxiliary	Main	Auxiliary
	Length and width (mm)	1,300 x 70	900 x 70	1,300 x 70	900 x 70
	Number	8	9	4	5
	Spring rate (kgf/mm ²)	25	74	29	104
	Axle limit (including suspension)	7,000kg		9,000kg	
	Tyre limit	7,600kg		9,400kg	

CHASSIS FRAME

Chassis frame variants	FD 1124 Crew	FE 1424 Crew
Main section in mm (depth x flange x thickness)	231.6 x 73 x 6.8	231.6 x 78 x 6.8
Chassis width (at rear)	820mm	
Tensile strength	540 N/mm ² (55 kgf/mm ²)	
Front Underrun Protection Device (FUPD)	Equipped	
Tow hook capacity (front and rear)	2,000 kgf (max angle of 15°)	
Type	Ladder-shaped channel section side rails	

WHEELS & TYRES

Model	FD 1124 Crew	FE 1424 Crew
Wheel type	6 stud disc wheel (JIS type) PCD 222.25	8 stud disc wheel (ISO type) PCD 275
Rim size	6.75 x 17.5 with 135mm offset	6.75 x 19.5 with 147mm offset
Tyre size	235/75R17.5 132/130	265/70R19.5 140/138
Number of tyres	7 including the spare	
Spare tyre carrier	Equipped	

FUEL TANK

Material	Steel
Fuel capacity	200L
Lockable fuel cap	Equipped
Prefilter & sedimenter	Equipped
Adblue® capacity	19L

ELECTRICAL

Type	24 volt negative earth
Batteries	12 volt x 2 (65D23L)
Alternator capacity	24 volt x 90 amp
Starter type	24 volt x 4.5kW
Headlamps	LED main beam with LED daytime running lamps
LED cornering/Fog lamps	Equipped
LED Interior and reading lamp	Equipped
Electric air horn	Equipped
CANBUS connected	Equipped J1939 protocol (see BMM for details)

STEERING

Type	Telescopic and tilt steering column with locking device. Recirculating ball with integral power steering.				
Gear ratio	19.0:1				
Steering angles	FD 1124 Crew	Inside	53°	Outside	38°
	FE 1424 Crew	Inside	43°	Outside	34°

GENUINE ACCESSORY OPTIONS

Bull bar options (see dealer for variants)	Engine live drive PTO (343Nm @ 1:1)
Dash mat	Lane change assist cameras
Sunvisor	Truck specific GPS nav with live traffic
Chrome wheel simulators	DVR Camera system (Dash Cam)
Seat covers	Cameras (up to additional 5 extra)
Floor mats	

CAB DETAILS

Type	Forward control, crew cab, all steel construction with electro hydraulic tilt mechanism
Grille colour	Chrome plate
Seating capacity	6 Opt 7 (refer to dealer for conditions)
Drivers seat	ISRI 6860 NTS2 air suspension, 10 way adjustable with integrated safety belt and rear pocket
Front side passenger seat	ISRI 6860 NTS2 air suspension, 10 way adjustable with integrated safety belt and rear pocket
Rear crew seats	Fixed bench type
Seat belts	3 point lap sash for driver and side passengers
	2 point lap for centre positions
Sunvisor and overhead console	For driver and front side passenger
Windscreen wipers	2 arm wiper and washers, 2 speed with intermittent
Cab heater and air conditioner	Equipped with 4 speed fan
Rear view mirrors	External: Electric & heated, 2 flat type
	2 convex spotters & kerb view
Auxiliary power supply	12 volt 120W socket and USB 2.1 amp
Floor covering	Vinyl type
Central locking and keyless entry	Equipped with immobiliser
Cab storage pockets	Equipped in both front doors
Power windows	Equipped
Foot rest	Equipped
Cup holders	3 centre and 2 door beverage holders
Multimedia System	10.1" UXGA capacity touch screen, wireless Apple CarPlay and Android auto compatible, AM/FM+RDS/DAB + radio, Bluetooth 5.0 phone and audio, input for up to 6 cameras, USB 2.0 and 3.0, 2.4 Ghz Wi-Fi enabled

INSTRUMENTATION



Meters	Steering wheel controls
Speedometer	Cruise control
Tachometer	MID controls
Air Gauges	Additional switches and controls
LCD display	External flat mirror control
Time	VSC off
Temperature Gauge	PCS off
Adblue® Gauge	LDWS off
Fuel Gauge	Idle up
Odometer	Quick warm up
Hour Meter	Mirror heater
Date & Day	Engine brake
Multi Information Display (MID)	Power and economy
General information	DPR regeneration
Cruise Control setting	Electric window lock out
Eco Tree	Head light leveller
Display setting	
Safe driving settings	
System Check	
Gear position	

FD 1124 Crew FE 1424 Crew

500 Series

DIMENSIONS – mm/WEIGHTS – kg

Model	FD 1124 Crew	FE 1424 Crew
Transmission	Automatic	Automatic
Suspension	Leaf	
Wheel base (WB)	5,540	
Product Code	FD2AP1A-DXGAE	FE2AP1A-EXGAE
OL	9,145	
OW	2,190	2,240
OH	2,560	2,620
CA	3,900	
FOH	1,145	
ROH	2,420	
RCH (at axle)	860	920
FT	1,780	1,760
RT	1,660	1,690
Kerb to Kerb	17,200	19,400
Wall to Wall	18,600	20,800
Indicative Chassis Mass – kg (10 litres of fuel, no tools or spare tyre & subject to a ±3% tolerance)		
Total	3,845	4,245
Front	2,645	2,795
Rear	1,200	1,450
GVM	11,000 (optional 8,000 available on application)	14,000 (optional 12,000 available on application)
GCM	20,000	21,000

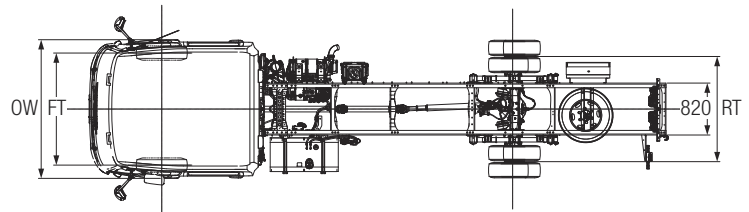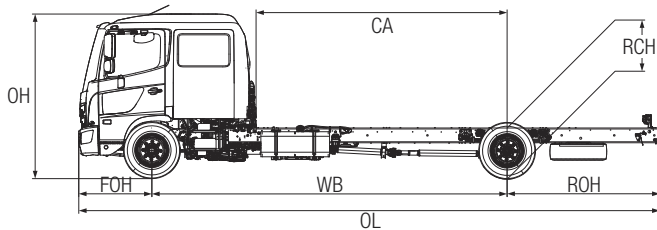

Drawings are for reference only to the table. For specific chassis layouts and dimensions please refer to Body Mounting Manual drawings.

WARRANTY

New vehicle warranty period

Medium Duty Model	Axle configuration	Standard warranty (whichever comes first)	Cab corrosion perforation
500 FD 1124 Crew and FE 1424 Crew	4 x 2	3 years or 150,000km	36 months

Battery warranty – 12 months from date of delivery

Genuine parts or accessories warranty – 3 years unlimited kilometres when fitted by an authorised Hino dealer *

* For conditions, refer to the Hino Parts & Service warranty brochure



DISCLAIMER

Important notice – Hino Trucks are distributed in Australia by Hino Motor Sales Australia Pty Ltd A C N 064 989 724. All efforts have been made to ensure the information contained in this brochure was correct at time of printing or uploading. Hino Motor Sales Australia Pty Ltd reserves the right to alter any details of the specifications and equipment without notice. Hino in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance placed by any person on anything contained in this brochure. You should therefore check with your authorised Hino dealer at the time of ordering your motor vehicle to ensure that colour, specifications, equipment, design features and options are available for the vehicle you are ordering. Please note that some options may only be available in combination with others. Authorised Hino dealers will on request provide up to date information on all accessories, design features, prices & availability. **Max Cruise control setting 106 km/h.