

# HINO

## 300 Series

## 921 Wide Cab



\*Image may contain items not standard to the model

**4 x 2 Cab Chassis**

## KEY FEATURES

Pre-Collision System (PCS) including AEB & PD  
 Vehicle Stability Control (VSC)  
 Lane Departure Warning System (LDWS)  
 Daytime Running Lamps (DRL)  
 Dual SRS Airbags  
 Reverse Camera  
 ECE R-29 Cab Strength Certified  
 Cruise Control\*\*  
 ADR 80/03 Emission level using Euro 5 Standard

## KEY SPECIFICATIONS

**GVM** . . . . . 8,500kg  
 . . . . . optional 4,495kg & 7,995kg  
**GCM** . . . . . GVM + 3,500kg  
**Power** . . . . . 205hp/151kW  
**Torque** . . . . . 600Nm  
**Transmissions** . . . . . 6 spd Automatic  
**Wheelbases** . . . . . 3.5m, 3.8m, 4.4m  
**Max Nominal Body Length** . . . . . 5.1m, 5.4m, 6.4m

ENGINE

Model	921 Automatic
Engine model	Hino J05E-UJ
Max. output (ISO Net) @ 2,600rpm	205hp/151kW
Max. torque (ISO Net) @ 1,500rpm	600Nm
Max. engine RPM	2,650
Engine compliance	ADR 80/03 using Euro 5 Standard
Type	Diesel, turbo & intercooled, 4 cylinder, OHC
Combustion system	Direct injection with EGR
Bore & stroke	112 x 130 mm
Piston displacement	5.123L
Fuel injection system	Electric control common rail
Air cleaner & intake	Behind cab mounting snorkel & dry paper element
Exhaust system	Horizontal outlet RHS
Emission control systems	DPR & DOC after treatments
Engine immobiliser	Equipped

TRANSMISSION & GEAR RATIOS

Make, model & Description	AUTOMATIC	
	Hino A465 HD 6 speed with double overdrive	
GEAR RATIOS	1	3.742
	2	2.003
	3	1.343
	4	1.000.
	5	0.773
	6	0.634
	Reverse	3.539
Torque Convertor & Ratio	1.65	


PERFORMANCE

Calculations based on 225/8017.5 tyres	921
Engne RPM @ 100 km/h	2217
Max theoretical speed km/h	119
Gradeability tan @ GVM	60.0%
Rear axle ratio	5.142

BRAKES

Type	Ventilated disc front & rear
Control	Dual circuit VOH with power brake assist
Disc diameter	Front 287mm & Rear 287mm
Exhaust Brake	Equipped
Park brake	Drum acting on transmission output shaft

POWER & TORQUE CHART (ISO NET) J05E-UJ

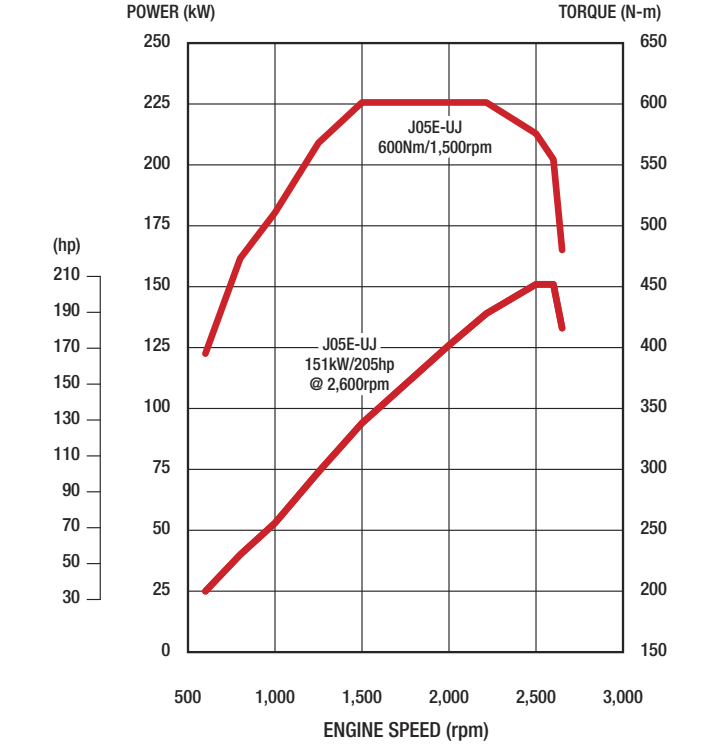

SAFETY FEATURES

Active Safety Features			
Vehicle Stability Control	VSC	Equipped	
Anti-lock Brakes System	ABS	Equipped	
Pre-Collision System	PCS	Equipped	
PCS is inclusive of	Autonomous Emergency Braking		AEB
	Pedestrian Detection		PD
	Lane Departure Warning System		LDWS
Traction Control	TC	Equipped	
Reverse Camera	RC	Equipped	
Daytime Running Lamps	DRL	Equipped	
Reverse Buzzer	Equipped		
Passive Safety Features			
ECE-R29 Cab Strength Certification		Equipped	
SRS airbags for driver & side passenger		Equipped	
SRS seatbelt pretensioner for driver & side passenger		Equipped	
Shock absorbing & collapsible steering column		Equipped	
Door Beams (anti side intrusion)		Equipped	

AXLE, SUSPENSION & LOAD LIMITS

FRONT	Front Axle Type	Reverse Elliot I-beam
	Suspension	Taper Leaf sprg, shock absorbers & Stabiliser bar
	Axle Limit (incl suspension)	3,100kg
	Tyre limit	3,100kg
REAR	Rear Axle Model & Type	SH13 fully floating single reduction
	Suspension	Taper Leaf sprg, shock absorbers
	Axle Limit (incl suspension)	6,200kg
	Tyre Limit	6,000kg

CHASSIS FRAME

Type	Ladder-shaped channel section side rails
Chassis frame wheelbase variants	All
Depth Flange Thickness in mm	210 x 70 x 5.0
Chassis width (at rear)	840mm
Tensile Strength	540 N/mm²
Tow Hook	Equipped

WHEELS & TYRES

Wheel type	6-Stud disc wheel (JIS type) PCD 222.25mm
Rim size	17.5" x 6.0" Offset 127mm
Tyre size	225/80R17.5 123/122
Number of wheels and tyres	Seven (7) including spare
Spare tyre carrier	Equipped

FUEL TANK & SUPPLY

Wheelbase variants	All
Material	Steel
Tank Capacity	200L
Lockable fuel cap	Equipped
Fuel Filter	Primary, secondary & sedimenter

ELECTRICAL

Type	24 volt negative earth system
Batteries	12 volt x 60 AH 55D23L x 2
Alternator capacity	80 amp
Starter type	24V–4.5kW
Headlamps	Halogen
Daytime Running Lamps (DRL's)	Equipped
Electric horn	Equipped
Reverse Buzzer	Equipped

STEERING

Type	Telescopic and Tilt adjustable steering column, recirculating ball integral power steering	
Steering Angle	Inside 44°	Outside 34°

GENUINE ACCESSORY OPTIONS

Bullbar	GPS navigation with live traffic truck spec
Chrome wheel covers	Seat covers (Wool, Canvas, Carbon)
Cameras (up to additional 5 extra)	Stone guard
Dash mat	Sunvisor
Dash Camera (DVR camera system)	Weathershields
Floor mats	Lane Change Assist Cameras

Please check with your dealer for availability, price & fitment

CAB EXTERIOR

Type	Forward control, all steel, welded construction, torsion-bar tilt mechanism, fully trimmed
Windscreen wipers washers	Dual wiper arms with intermittent & 2 speeds
Grille Colour	Chrome
Outside rearview mirrors	2 Flat type main, heated & electric control
	2 convex spotter type, mounted below the main
Windscreen Glass	Heat absorbing laminated glass

CAB INTERIOR


Seating Capacity		Three (3)
Driver's seat		2-way adjustable, urethane foam pads with suspension
Assistant's Seat		Fixed bench, split back, urethane foam pads
Seat Covering		Fabric cover
Seat belts	Driver's seat	3-point Lap/Sash type with ELR and pre-tensioner
	Assistant's seat	
	Centre seat	2-point Lap type
SRS airbags		Driver & side passenger
Sun visor & overhead consoles		Driver & side passenger
Inside rearview mirror		Single centre mounted flat type
Lighter/24 volt socket		Equipped
Multimedia unit		10.1" UXGA capacity touch screen, wireless Apple CarPlay and Android auto compatible, AM/FM+RDS/DAB + radio, Bluetooth 5.0 phone and audio, input for up to 6 cameras, USB 2.0 and 3.0, 2.4 Ghz Wi-Fi enabled
Heater & Air conditioner		Equipped with 4 speed fan
Central & remote door locking		Equipped with Immobiliser
Power windows		Equipped
Drivers footrest		Equipped
Driver's seat back pocket		Equipped
Centre fold down tray		Equipped
Cup holders		Sides of dash & centre console
Tool kit & Jack		Equipped
Courtesy lights front & rear		Equipped

INSTRUMENTATION & CONTROLS

<b>Meters &amp; Gauges</b>	<b>Multi Information Display (MID)</b>
Speedometer	Safety feature settings
Tachometer	General information settings
<b>LCD Display</b>	Eco driving
Clock	DPR filter gauge
Battery warning	Cruise control settings
Coolant	<b>Dash mounted switches</b>
Fuel	Heater & A/C controls
ODO meter	LDWS off
<b>Steering wheel &amp; Column controls</b>	PCS off
MID setting	VSC off
Cruise control settings	Headlight leveller
Hands free phone	Hazard lights
Lights & Indicator	DPR manual regeneration
Exhaust brake & wiper washer	

# 921 Wide Cab

# 300 Series

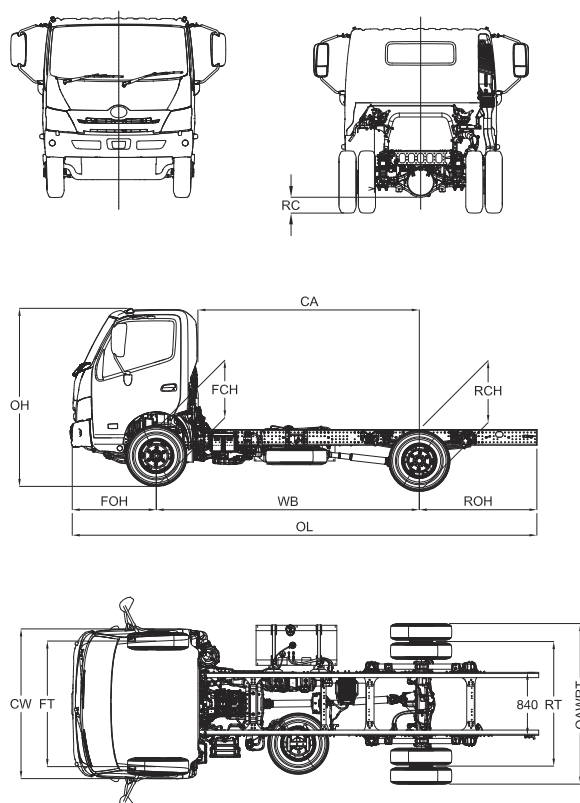

## DIMENSIONS (MM) / WEIGHTS (KG) / CAPACITIES (L)

Model Description	921 AT 3500 WIDE	921 AT 3800 WIDE	921 AT 4400 WIDE
Product Code	XJC710R-WKTTJQ3	XJC720R-WKTTJQ3	XJC740R-WKTTJQ3
Max Nom Body length (WBx0.6)+CA-80)	4,955	5,435	6,395
Wheelbase (WB)	3,500	3,800	4,400
Overall length (OL)	6,205	6,505	7,905
Cab Width (CW)	1,995		
Over All Width Rear Tyres (OAWRT)	2,135		
Overall height (OH)	2,350		
Cab to rear Axle centre (CA)	2,935	3,235	3,835
Front Overhang (FOH)	1,135		
Rear Overhang (ROH)	1,570		2,370
Front Chassis Height (FCH)	745		
Rear Chassis Height (RCH)	840		
Road Clearance (RC)	200		
Front Track (FT)	1,655		
Rear Track (RT)	1,660		
Turning Circle	Kerb to Kerb	12,600	13,600
	Wall to Wall	14,000	15,000
Indicative chassis mass—kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)			
Total	2,775	2,785	2,865
Front	1,860	1,875	1,865
Rear	915	910	970
Standard Ratings	GVM	8,500	
	GCM	12,000	
Optional Ratings	GVM	7,995	
	GCM	11,495	
	GVM	4,495	
	GCM	7,995	

Drawings are for reference only to the table. For specific layouts please refer to the Body Mounting Manual drawings.

## WARRANTY


New vehicle warranty period

Light Duty Model	Axle configuration	Standard warranty (whichever comes first)	Cab corrosion perforation
300 Series	4 x 2	5 years or 250,000km	60 months

Battery warranty – 12 months from date of delivery

Genuine parts or accessories warranty – 3 years unlimited kilometres when fitted by an authorised Hino dealer \*

\* For conditions, refer to the Hino Parts & Service warranty brochure



## DISCLAIMER

Important notice – Hino Trucks are distributed in Australia by Hino Motor Sales Australia Pty Ltd A C N 064 989 724. All efforts have been made to ensure the information contained in this brochure was correct at time of printing or uploading. Hino Motor Sales Australia Pty Ltd reserves the right to alter any details of the specifications and equipment without notice. Hino in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance placed by any person on anything contained in this brochure. You should therefore check with your authorised Hino dealer at the time of ordering your motor vehicle to ensure that colour, specifications, equipment, design features and options are available for the vehicle you are ordering. Please note that some options may only be available in combination with others. Authorised Hino dealers will on request provide up to date information on all accessories, design features, prices & availability. \*\*Maximum Cruise control setting 106 km/h.