

HINO

300 Series

SteelAce Range



*Image may contain items not standard to the model

KEY FEATURES

Steel Tray with drop sides, ladder racks and premium bullbar
 Pre-Collision System (PCS) including AEB & PD
 Vehicle Stability Control (VSC) including ABS & TC
 Lane Departure Warning System (LDWS)
 Daytime Running Lamps (DRL)
 Dual SRS Airbags
 Reverse Camera
 ECE R-29 Cab Strength Certified
 Cruise Control**
 ADR 80/03 Emission level using Euro 5 Standard



KEY SPECIFICATIONS

GVM 4,495 to 6,500 kg
GCM GVM + 3,500kg
 Automatic up to 8,000kg
Power range 150hp for Automatic models
 165hp for Manual models
Torque range 420Nm for Automatic models
 464Nm for Manual models
Transmissions 6 spd Manual & 6 spd Automatic
Wheelbase 3.4m*
Nominal Body Length 4.5m*

*See Model details for exact dimensions

MODEL DETAILS



Model Description		616 AT 3430 WIDE STEELACE		617 MT 3430 WIDE STEELACE	
Product Code		XZU710R-WKTMSQ3 SA		XZU710R-WKFMTQ3 SA	
STEELACE details					
Internal length		4,375			
Internal width		2,310			
Floor thickness		3 mm			
Rope rails		25 mm			
Ladder racks		2			
Ladder rack rating		350 kg			
Drop sides		2			
Height of Drop sides & tailgate		300			
VEHICLE DETAILS					
Engine speed @ 100 Km/h		2,165rpm		2,128rpm	
Max theoretical speed		143km/h		145km/h	
Engine Power & Torque (hp & Nm)		150hp/420Nm		165hp/464Nm	
Transmission type & number of forward gears		Automatic 6 speed		Manual 6 speed	
Fuel Tank Capacity		150 L			
Wheels & Tyres		195/85R16			
Seating Capacity		3			
DIMENSIONS – (MM)/WEIGHTS – (kg)/CAPACITIES – (L)					
Wheelbase (WB)		3,430			
Overall length (OL)		6,435			
Overall width (OW)		2,400			
Cab width		1,995			
Overall height (OH)		2,475			
Front Overhang (FOH)		1,115			
Road Clearance (RC)		170			
Front Track (FT)		1,655			
Rear Track (RT)		1,480			
Turning circle	Kerb to Kerb	11,800			
	Wall to Wall	13,200			
Indicative chassis mass–kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)					
Total		3,285		3,260	
Front		1,780		1,760	
Rear		1,505		1,500	
Standard Ratings	GVM	4,495			
	GCM	7,995			
Optional Ratings	GVM	5,500			
	GCM	8,000		9,000	

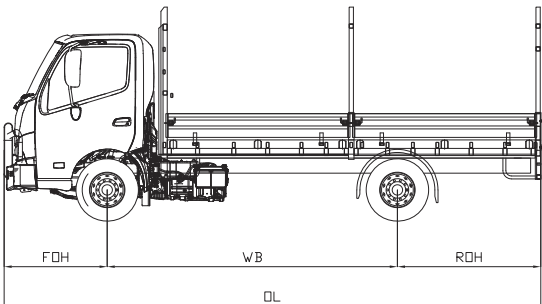

Drawings are for reference only to the dimensions table above. For specific layouts please refer to the applicable Body Mounting Manual (BMM).

MODEL DETAILS

Model Description		716 AT 3430 WIDE STEELACE		717 MT 3430 WIDE STEELACE	
Product Code		XZU710R-WKTQSQ3 SA		XZU710R-WKFQTQ3 SA	
STEELACE details					
Internal length		4,375			
Internal width		2,310			
Floor thickness		3 mm			
Rope rails		25 mm			
Ladder racks		2			
Ladder rack rating		350 kg			
Drop sides		2			
Height of Drop sides & tailgate		300			
VEHICLE DETAILS					
Engine speed @ 100 Km/h		2,246rpm		2,213rpm	
Max theoretical speed		138km/h		140km/h	
Engine Power & Torque (hp & Nm)		150hp/420Nm		165hp/464Nm	
Transmission type & number of forward gears		Automatic 6 speed		Manual 6 speed	
Fuel Tank Capacity		150 L			
Wheels & Tyres		205/85R16			
Seating Capacity		3			
DIMENSIONS – (MM)/WEIGHTS – (kg)/CAPACITIES – (L)					
Wheelbase (WB)		3,430			
Overall length (OL)		6,435			
Overall width (OW)		2,400			
Cab width		1,995			
Overall height (OH)		2,475			
Front Overhang (FOH)		1,115			
Road Clearance (RC)		185			
Front Track (FT)		1,655			
Rear Track (RT)		1,520			
Turning circle	Kerb to Kerb	11,400			
	Wall to Wall	12,800			
Indicative chassis mass–kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)					
Total		3,400		3,365	
Front		1,825		1,800	
Rear		1,575		1,565	
Standard Ratings	GVM	6,500			
	GCM	8,000		10,000	
Optional Ratings	GVM	4,495			
	GCM	7,995			

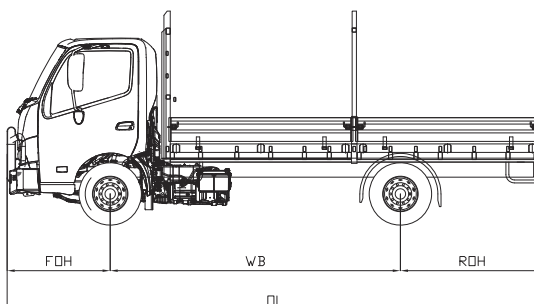

Drawings are for reference only to the dimensions table above. For specific layouts please refer to the applicable Body Mounting Manual (BMM).

SAFETY FEATURES

Active Safety Features			
Vehicle Stability Control	VSC	Equipped	
Anti-lock Brakes System	ABS	Equipped	
Pre-Collision System	PCS	Equipped	
PCS is inclusive of	Autonomous Emergency Braking		AEB
	Pedestrian Detection		PD
	Lane Departure Warning System		LDWS
Traction Control	TC	Equipped	
Reverse Camera	RC	Equipped	
Easy and Smooth Start	ES	Equipped (MT models only)	
Daytime Running Lamps	DRL	Equipped	
Reverse Buzzer		Equipped	
Passive Safety Features			
ECE-R29 Cab Strength Certification		Equipped	
SRS airbags for driver & side passenger		Equipped	
SRS seatbelt pretensioner for driver & side passenger		Equipped	
Shock absorbing & collapsible steering column		Equipped	
Door Impact Beams		Equipped	

BODY FEATURES

All steel construction
Rope rails
Ladder racks
Removable double drop sides with single tail gate
Front and rear side steps left & right

GENUINE ACCESSORY OPTIONS

Chrome wheel covers
Cameras (up to additional 5 extra)
Dash and Floor mats
Dash Camera (DVR Camera System)
GPS navigation with live traffic (Truck spec)
Seat covers (Wool, Canvas, Carbon)
UHF CB Radio Kit
Stone guard
Sunvisor
Weathershields
Lane change assist cameras
Please check with your dealer for availability, price & fitment

For Cab Chassis related specifications not included in this document please refer to the applicable Cab Chassis spec sheet or Body mounting Manual

WARRANTY

New vehicle warranty period

Light Duty Model	Axle configuration	Standard warranty (whichever comes first)	Cab corrosion perforation
300 Series	4 x 2	5 years or 250,000km	60 months

Battery warranty – 12 months from date of delivery

* For conditions, refer to the Hino Parts & Service warranty brochure

Genuine parts or accessories warranty – 3 years unlimited kilometres when fitted by an authorised Hino dealer *

Built to Go Body warranty – 5 years or 250,000km (whichever comes first)



DISCLAIMER

Important notice – Hino Trucks are distributed in Australia by Hino Motor Sales Australia Pty Ltd A C N 064 989 724. All efforts have been made to ensure the information contained in this brochure was correct at time of printing or uploading. Hino Motor Sales Australia Pty Ltd reserves the right to alter any details of the specifications and equipment without notice. Hino in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance placed by any person on anything contained in this brochure. You should therefore check with your authorised Hino dealer at the time of ordering your motor vehicle to ensure that colour, specifications, equipment, design features and options are available for the vehicle you are ordering. Please note that some options may only be available in combination with others. Authorised Hino dealers will on request provide up to date information on all accessories, design features, prices & availability. **Maximum Cruise control setting 106 km/h.