

# HINO 300 Series

## TradeAce Range



\*Image may contain items not standard to the model

## KEY FEATURES

Aluminium Tray with drop sides & ladder racks  
Nudge bar for STD & Bullbar for Wide Cab models  
STD, Wide & Crew cab variants  
Pre-Collision System (PCS) including AEB & PD  
Vehicle Stability Control (VSC) including ABS & TC  
Lane Departure Warning System (LDWS)  
Daytime Running Lamps (DRL)  
Dual SRS Airbags  
Reverse Camera  
ECE R-29 Cab Strength Certified  
Cruise Control \*\*  
ADR 80/03 Emission level using Euro 5 Standard




## KEY SPECIFICATIONS

**GVM.** . . . . . 4,499 to 6,500 kg  
**GCM.** . . . . . GVM + 3,500kg  
. . . . . 616 Automatic limited to 8,000kg  
**Power range** . . . . . 150hp to 205hp  
**Torque range** . . . . . 420Nm to 600Nm  
**Transmissions** . STD cab . . 5 spd Manual & 6 spd Automatic  
. . . . . Wide cab . . 6 spd Manual & 6 spd Automatic  
**Wheelbases** . . . . . .2.5m to 4.4m\*  
**Nominal Body Length** . . . . . .3.2m to 4.5m\*

\*See Model details for exact dimensions

## MODEL DETAILS




Model Description	616 MT 2525 STD TRADEACE	616 AT 2525 STD TRADEACE	616 AT 3375 STD TRADEACE	617 MT 2810 Wide TRADEACE	616 AT 2810 Wide TRADEACE
Product Code	XZU605R- WKMSQ3 TA	XZU605R- WKTMSQ3 TA	XZU655R- WKTMSQ3 TA	XZU700R- WKFMTQ3 TA	XZU700R- WKTMSQ3 TA
<b>TRADEACE BODY DETAILS</b>					
Internal length	3,080		4,435	3,535	
Internal width	1,800			2,055	
Floor rating	4 tonnes				
Rope rails	40 x 3 mm				
Ladder racks	1		2	1	
Ladder rack rating	250 kg		350 kg	250 kg	
Drop sides per side	1		2	1	
Height of Drop sides & tailgate	257 mm			365 mm	
<b>VEHICLE DETAILS</b>					
Engine speed @ 100 Km/h	2,500rpm	2,230rpm		2,128rpm	2,165rpm
Max theoretical speed	124km/h	139km/h		145km/h	143km/h
Engine Power & Torque (HP & kW)	150hp/420Nm			165hp/464Nm	150hp/420Nm
Transmission type & number of forward gears	Manual 5 speed	Automatic 6 speed		Manual 6 speed	Automatic 6 speed
Fuel Tank Capacity	80 L		100 L	100 L	
Wheels & Tyres	185/85R16			195/85R16	
Seating capacity	3				
<b>DIMENSIONS – (MM)/WEIGHTS – (kg)</b>					
Wheelbase (WB)	2,525		3,375	2,810	
Overall length (OL)	4,865		6,220	5,585	
Overall width (OW)	1,880			2,135	
Cab width	1,695			1,995	
Overall height (OH)	2,300			2,460	
Front Overhang (FOH)	980			1,115	
Road Clearance (RC)	170				
Front Track (FT)	1,400			1,655	
Rear Track (RT)	1,435			1,480	
Turning circle	Kerb to Kerb	9,600		12,600	9,800
	Wall to Wall	10,800		13,800	11,200
Indicative chassis mass–kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)					
Total	2,254	2,289	2,398	2,550	2,582
Front	1,409	1,429	1,481	1,673	1,693
Rear	845	860	917	879	889
Standard Ratings	GVM	4,499			
	GCM	7,999			
Optional Ratings	GVM	5,500			
	GCM	9,000	8,000		9,000, 8,000

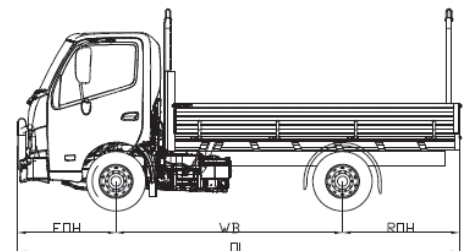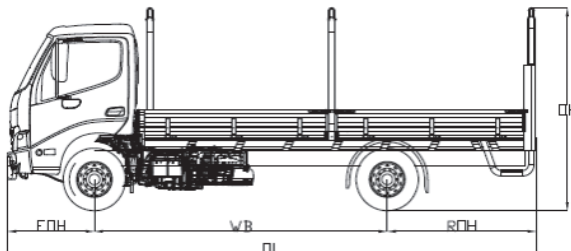

Drawings are for reference only to the dimensions table above.

## MODEL DETAILS

Model Description	617 MT 3430 Wide TRADEACE	616 AT 3430 Wide TRADEACE	721 AT 3500 Wide TRADEACE	616 AT 3870 Wide CREW TRADEACE	721 AT 4400 Wide CREW TRADEACE
Product Code	XZU710R-WKFMTQ3 TA	XZU710R-WKTMSQ3 TA	XJC710R-WKTQJQ3 TA	XZU720R-ZKTMSQ3 TA	XJC740R-ZKTQJQ3 TA
<b>TRADEACE BODY DETAILS</b>					
Internal length	4,435			4,135	4,435
Internal width	2,055		2,220	2,055	2,220
Floor rating	4 tonnes		6 tonnes	4 tonnes	
Rope rails	40 x 3 mm				
Ladder racks	2				
Ladder rack rating	350 kg				
Drop sides per side	2				
Height of Drop sides & tailgate	365 mm				
<b>VEHICLE DETAILS</b>					
Engine speed @ 100 Km/h	2,128rpm	2,165rpm	1,994rpm	2,165rpm	1,994rpm
Max theoretical speed	145km/h	143km/h	133km/h	143km/h	133km/h
Engine Power & Torque (HP & kW)	165hp/464Nm	150hp/420Nm	205hp/600Nm	150hp/420Nm	205hp/600Nm
Transmission type & number of forward gears	Manual 6 speed		Automatic 6 speed		
Fuel Tank Capacity	150L		200 L	100 L	200 L
Wheels & Tyres	195/85R16		225/80R17.5	195/85R16	225/80R17.5
Seating capacity	3			7	
<b>DIMENSIONS – (MM)/WEIGHTS – (kg)</b>					
Wheelbase (WB)	3,430		3,500	3,870	4,400
Overall length (OL)	6,485		6,530	7,300	7,535
Overall width (OW)	2,135		2,300	2,135	2,300
Cab width	1,995				
Overall height (OH)	2,460		2,640	2,460	2,640
Front Overhang (FOH)	1,115				
Road Clearance (RC)	170		215	170	215
Front Track (FT)	1,655				
Rear Track (RT)	1,480		1,660	1,480	1,660
Turning circle	Kerb to Kerb	11,800	12,600	13,000	15,600
	Wall to Wall	13,200	14,000	14,400	17,000
Indicative chassis mass–kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)					
Total	2,645	2,670	3,132	2,919	3,432
Front	1,679	1,699	1,966	1,819	2,157
Rear	966	971	1,166	1,100	1,275
Standard Ratings	GVM	4,499	6,500	4,499	6,500
	GCM	7,999	10,000	7,999	10,000
Optional Ratings	GVM	5,500	4,499	5,500	–
	GCM	9,000	8,000	7,999	8,000

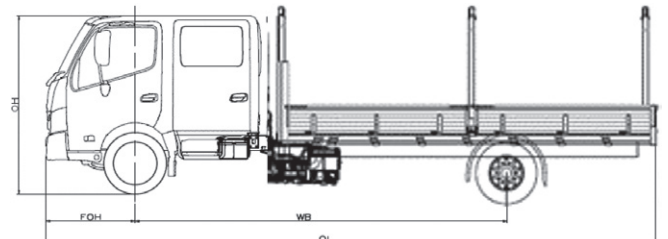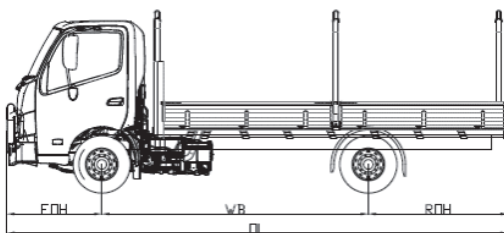

For specific layouts please refer to the applicable body mounting manual. (BMM)

## TradeAce Range

### SAFETY FEATURES

Active Safety Features		
Vehicle Stability Control	VSC	Equipped
Anti-lock Brakes System	ABS	Equipped
Pre-Collision System	PCS	Equipped
PCS is inclusive of	Autonomous Emergency Braking	AEB
	Pedestrian Detection	PD
Traction Control	TC	Equipped
Lane Departure Warning System	LDWS	Equipped
Reverse Camera	RC	Equipped
ES Start (MT models only)	ES	Equipped
Daytime Running Lamps	DRL	Equipped
Reverse Buzzer		Equipped
Passive Safety Features		
ECE-R29 Cab Strength Certification		Equipped
SRS airbags for driver & side passenger		Equipped
SRS seatbelt pretensioner for driver & side passenger		Equipped
Shock absorbing & collapsible steering column		Equipped
Door Beams (anti side intrusion)		Equipped

### BODY FEATURES

Aluminium construction
Rope rails
Ladder racks
Dropsides with tailgate
Front side steps left & right

### GENUINE ACCESSORY OPTIONS

Chrome wheel covers
Cameras (up to additional 5 extra)
Dash & Floor mats
Lane Change Assist Cameras
Truck spec GPS navigation with live traffic
Seat covers (Wool, Canvas, Carbon)
Stone guard
Weathershields
Body internal tie down "I" bolts
Please check with your dealer for availability, price & fitment

For Cab Chassis related specifications not included in this document please refer to the applicable Cab Chassis spec sheet or Body mounting Manual

### WARRANTY

New vehicle warranty period

Light Duty Model	Axle configuration	Standard warranty (whichever comes first)	Cab corrosion perforation
300 Series	4 x 2	5 years or 250,000km	60 months

Battery warranty – 12 months from date of delivery

\* For conditions, refer to the Hino Parts & Service warranty brochure

Genuine parts or accessories warranty – 3 years unlimited kilometres when fitted by an authorised Hino dealer \*

Built to Go Body warranty – 5 years or 250,000km (whichever comes first)



### DISCLAIMER

Important notice – Hino Trucks are distributed in Australia by Hino Motor Sales Australia Pty Ltd A C N 064 989 724. All efforts have been made to ensure the information contained in this brochure was correct at time of printing or uploading. Hino Motor Sales Australia Pty Ltd reserves the right to alter any details of the specifications and equipment without notice. Hino in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance placed by any person on anything contained in this brochure. You should therefore check with your authorised Hino dealer at the time of ordering your motor vehicle to ensure that colour, specifications, equipment, design features and options are available for the vehicle you are ordering. Please note that some options may only be available in combination with others. Authorised Hino dealers will on request provide up to date information on all accessories, design features, prices & availability. \*\*Maximum Cruise control setting 106 km/h. \*\*\* GVM ratings of 4,499kg are conditional that the ADR definition of a "Goods Vehicle" can be met.