

HINO 300 Series

5 Litre Crew Cab Range



*Image may contain items not standard to the model

4 x 2 Cab Chassis

KEY FEATURES

Pre-Collision System (PCS) including AEB & PD
Vehicle Stability Control (VSC)
Lane Departure Warning System (LDWS)
Daytime Running Lamps (DRL)
Dual SRS Airbags
Reverse Camera
ECE R-29 Cab Strength Certified
Cruise Control**
ADR 80/03 Emission level using Euro 5 Standard
Crew cab, 7 seats, 3 front & 4 rear
Rear passenger air conditioning

KEY SPECIFICATIONS

Model	721 Crew	921 Crew
GVM	6,500kg	8,000kg
GCM	GVM + 3,500kg	
Power	205hp / 151kW	
Torque	600Nm	
Transmissions	6 spd Automatic	
Wheelbases	4.4m	
Max Nominal Body Length	5.4m	

ENGINE

Model	721 & 921
Engine model	Hino J05E-UJ
Max. output (ISO Net) @ 2,600rpm	205hp/151kW
Max. torque (ISO Net) @ 1,500rpm	600Nm
Max. engine RPM	2,650
Engine compliance	ADR 80/03 using Euro 5 Standard
Type	Diesel, turbo & intercooled, 4 cylinder, OHC
Combustion system	Direct injection with EGR
Bore & stroke	112 x 130 mm
Piston displacement	5.123L
Fuel injection system	Electric control common rail
Air cleaner & intake	Behind cab mounting snorkel & dry paper element
Exhaust system	Horizontal outlet RHS
Emission control systems	DPR & DOC after treatments
Engine immobiliser	Equipped

TRANSMISSION & GEAR RATIOS

Variant	AUTOMATIC	
Make, model & Description	Hino A465 HD 6 speed with double overdrive	
GEAR RATIOS	1	3.742
	2	2.003
	3	1.343
	4	1.000.
	5	0.773
	6	0.634
	Reverse	3.539
Torque Convector Ratio	1.65	


PERFORMANCE

Models	721	921
Engine RPM @ 100 km/h	1,994	2217
Max theoretical speed km/h	133	119
Gradeability tan @ GVM	60.0%	60.0%
Rear axle ratio	4.625	5.142

BRAKES

Type	Ventilated disc front & rear
Control	Dual circuit VOH with power brake assist
Disc diameter	Front 287mm & Rear 287mm
Exhaust Brake	Equipped
Park brake	Drum acting on transmission output shaft

POWER & TORQUE CHART (ISO NET) J05E-UJ

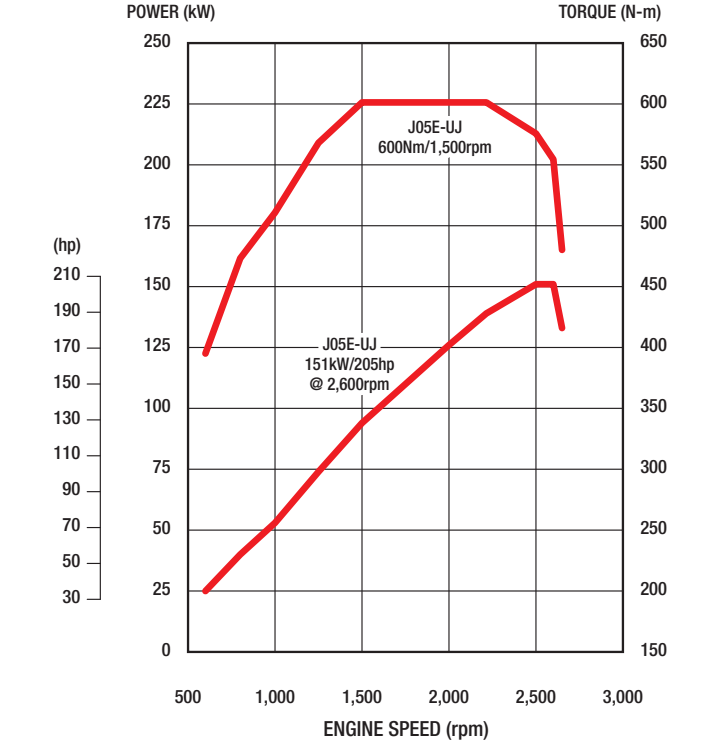

SAFETY FEATURES

Active Safety Features			
Vehicle Stability Control	VSC	Equipped	
Anti-lock Brakes System	ABS	Equipped	
Pre-Collision System	PCS	Equipped	
PCS is inclusive of	Autonomous Emergency Braking		AEB
	Pedestrian Detection		PD
	Lane Departure Warning System		LDWS
Traction Control	TC	Equipped	
Reverse Camera	RC	Equipped	
Daytime Running Lamps	DRL	Equipped	
Reverse Buzzer	Equipped		
Passive Safety Features			
ECE-R29 Cab Strength Certification			Equipped
SRS airbags for driver & side passenger			Equipped
SRS seatbelt pretensioner for driver & side passenger			Equipped
Shock absorbing & collapsible steering column			Equipped
Door Beams (anti side intrusion)			Equipped

AXLE, SUSPENSION & LOAD LIMITS

Model		721	921
FRONT	Front Axle Type	Reverse Elliot I-beam	
	Suspension	Taper Leaf sprg, shock absorbers & Stabiliser bar	
	Axle Limit (incl suspension)	3,100kg	
	Tyre limit	3,100kg	
REAR	Rear Axle Model	SH12	SH13
	Type	Fully floating single reduction	
	Suspension	Taper Leaf sprg, shock absorbers	
	Axle Limit (incl suspension)	5,500kg	6,200kg
	Tyre Limit	6,000kg	

CHASSIS FRAME

Type	Ladder-shaped channel section side rails
Chassis frame wheelbase variants	All
Depth Flange Thickness in mm	210 x 70 x 5.0mm
Chassis width (at rear)	840mm
Tensile Strength	540 N/mm²
Tow Hook	Equipped

WHEELS & TYRES

Wheel type	6-Stud disc wheel (JIS type) PCD 222.25mm
Rim size	17.5" x 6.0" Offset 127mm
Tyre size	225/80R17.5 123/122
Number of wheels and tyres	Seven (7) including spare
Spare tyre carrier	Equipped

FUEL TANK & SUPPLY

Wheelbase variants	All
Material	Steel
Tank Capacity	200L
Lockable fuel cap	Equipped
Fuel Filter	Primary, secondary & sedimenter

ELECTRICAL

Type	24 volt negative earth system
Batteries	12 volt x 60 AH 55D23L x 2
Alternator capacity	80 amp
Starter type	24V–4.5kW
Headlamps	Halogen
Daytime Running Lamps (DRL's)	Equipped
Electric horn	Equipped
Reverse Buzzer	Equipped

STEERING

Type	Telescopic and Tilt adjustable steering column, recirculating ball integral power steering	
Steering Angle	Inside 44°	Outside 34°

GENUINE ACCESSORY OPTIONS

Bullbar	GPS navigation with live traffic truck spec
Chrome wheel covers	Seat covers (Wool, Canvas, Carbon)
Cameras (up to additional 5 extra)	Stone guard
Dash mat	Sunvisor
Dash Camera (DVR camera system)	Weathershields
Floor mats	

Please check with your dealer for availability, price & fitment

CAB EXTERIOR

Type	Forward control, all steel, welded construction, fully trimmed
Windscreen wipers washers	Dual wiper arms with intermittent & 2 speeds
Grille Colour	Chrome
Outside rearview mirrors	2 Flat type main, heated & electric control
	2 convex spotter type, mounted below the main
Windscreen Glass	Heat absorbing laminated glass

CAB INTERIOR


Seating Capacity		Seven, 3 front & 4 rear
Driver's seat		2-way adjustable, urethane foam pads with suspension
Assistant's Seat		Fixed bench, split back, urethane foam pads
Seat Covering		Fabric cover
Rear Seat		Fixed bench type with fabric cover
Seat belts	Driver's seat	3-point Lap/Sash type with ELR and pre-tensioner
	Assistant's seat	
	Centre seat	2-point Lap type
	Rear seats	Outer 3-point lap/sash, inner 2-point lap
SRS airbags		Driver & front side passenger
Sun visor & overhead consoles		Driver & front side passenger
Inside rearview mirror		Single centre mounted flat type
Lighter/24 volt socket		Equipped
Multimedia unit		10.1" UXGA capacity touch screen, wireless Apple CarPlay and Android auto compatible, AM/FM+RDS/DAB + radio, Bluetooth 5.0 phone and audio, input for up to 6 cameras, USB 2.0 and 3.0, 2.4 Ghz Wi-Fi enabled
Heater & Air conditioner		Equipped with 4 speed fan
		Rear passenger air conditioning
Central & remote door locking		Equipped with Immobiliser
Power windows		Equipped
Drivers footrest		Equipped
Driver's seat back pocket		Equipped
Centre fold down tray		Equipped
Cup holders		Sides of dash & centre console
Tool kit & Jack		Equipped
Courtesy Lights front & rear		Equipped

INSTRUMENTATION & CONTROLS

Meters & Gauges	Multi Information Display (MID)
Speedometer	Safety feature settings
Tachometer	General information settings
LCD Display	Eco driving
Clock	DPR filter gauge
Battery warning	Cruise control settings
Coolant	Dash mounted switches
Fuel	Heater & A/C controls
ODO meter	LDWS off
Steering wheel & Column controls	PCS off
MID setting	VSC off
Cruise control settings	Headlight leveller
Hands free phone	Hazard lights
Lights & Indicator	DPR manual regeneration
Exhaust brake & wiper washer	

HINO 300 Series

5 Litre Crew Cab Range

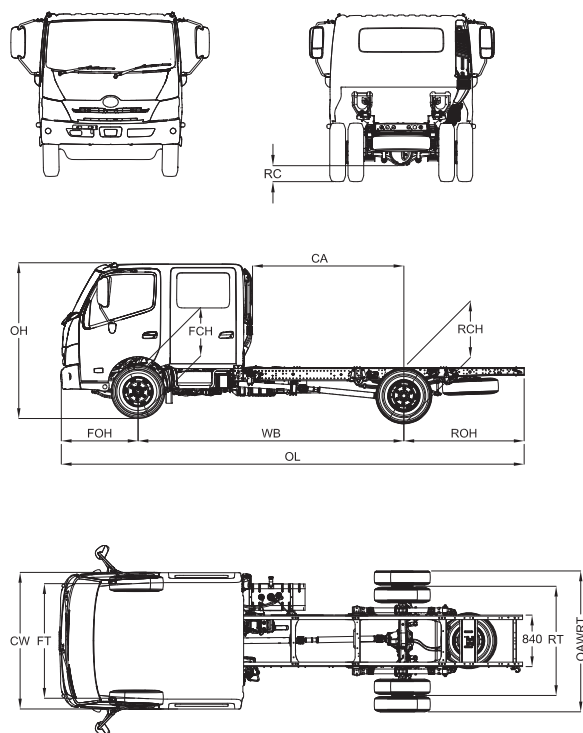

DIMENSIONS (MM) / WEIGHTS (KG) / CAPACITIES (L)

Model Description	721 AT 4400 WIDE CREW	921 AT 4400 WIDE CREW
Product Code	XJC740R-ZKTQJQ3	XJC740R-ZKTTJQ3
Max Nom Body length (WBx0.6)+CA-80)	5,390	
Wheelbase (WB)	4,400	
Overall length (OL)	7,905	
Cab Width (CW)	1,995	
Over All Width Rear Tyres (OAWRT)	2,135	
Overall height (OH)	2,350	
Cab to rear Axle centre (CA)	2,830	
Front Overhang (FOH)	1,135	
Rear Overhang (ROH)	2,370	
Front Chassis Height (FCH)	745	740
Rear Chassis Height (RCH)	825	835
Road Clearance (RC)	210	195
Front Track (FT)	1,655	
Rear Track (RT)	1,660	
Turning Circle	Kerb to Kerb	15,600
	Wall to Wall	17,000
Indicative chassis mass – kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)		
Total	3,030	3,080
Front	2,025	2,040
Rear	1,005	1,040
Standard Ratings	GVM	6,500
	GCM	10,000
Standard Ratings	GVM	8,000
	GCM	11,500

Drawings are for reference only to the table. For specific layouts please refer to the Body Mounting Manual drawings.

WARRANTY

New vehicle warranty period

Light Duty Model	Axle configuration	Standard warranty (whichever comes first)	Cab corrosion perforation
300 Series	4 x 2	5 years or 250,000km	60 months

Battery warranty – 12 months from date of delivery

* For conditions, refer to the Hino Parts & Service warranty brochure

Genuine parts or accessories warranty – 3 years unlimited kilometres when fitted by an authorised Hino dealer *



DISCLAIMER

Important notice – Hino Trucks are distributed in Australia by Hino Motor Sales Australia Pty Ltd A C N 064 989 724. All efforts have been made to ensure the information contained in this brochure was correct at time of printing or uploading. Hino Motor Sales Australia Pty Ltd reserves the right to alter any details of the specifications and equipment without notice. Hino in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance placed by any person on anything contained in this brochure. You should therefore check with your authorised Hino dealer at the time of ordering your motor vehicle to ensure that colour, specifications, equipment, design features and options are available for the vehicle you are ordering. Please note that some options may only be available in combination with others. Authorised Hino dealers will on request provide up to date information on all accessories, design features, prices & availability. **Maximum Cruise control setting 106 km/h. *** GVM ratings of 4,499kg are conditional that the ADR definition of a "Goods Vehicle" can be met.