

# HINO 300 Series

## SteelAce Range



\*Image may contain items not standard to the model

## KEY FEATURES

Steel Tray with drop sides, ladder racks and premium bullbar  
Pre-Collision System (PCS) including AEB & PD  
Vehicle Stability Control (VSC) including ABS & TC  
Lane Departure Warning System (LDWS)  
Daytime Running Lamps (DRL)  
Dual SRS Airbags  
Reverse Camera  
ECE R-29 Cab Strength Certified  
Cruise Control\*\*  
ADR 80/03 Emission level using Euro 5 Standard



## KEY SPECIFICATIONS

**GVM.** . . . . . 4,499 to 6,500 kg  
**GCM.** . . . . . GVM + 3,500kg  
. . . . . Automatic up to 8,000kg  
**Power range** . . . . . 150hp for Automatic models  
. . . . . 165hp for Manual models  
**Torque range** . . . . . 420Nm for Automatic models  
. . . . . 464Nm for Manual models  
**Transmissions** . . . . . 6 spd Manual & 6 spd Automatic  
**Wheelbase** . . . . . 3.4m\*  
**Nominal Body Length** . . . . . 4.5m\*

\*See Model details for exact dimensions

MODEL DETAILS



Model Description		616 AT 3430 WIDE STEELACE		617 MT 3430 WIDE STEELACE	
Product Code		XZU710R-WKTMSQ3 SA		XZU710R-WKFMTQ3 SA	
STEELACE details					
Internal length		4,375			
Internal width		2,310			
Floor thickness		3 mm			
Rope rails		25 mm			
Ladder racks		2			
Ladder rack rating		350 kg			
Drop sides		2			
Height of Drop sides & tailgate		300			
VEHICLE DETAILS					
Engine speed @ 100 Km/h		2,165rpm		2,128rpm	
Max theoretical speed		143km/h		145km/h	
Engine Power & Torque (hp & Nm)		150hp/420Nm		165hp/464Nm	
Transmission type & number of forward gears		Automatic 6 speed		Manual 6 speed	
Fuel Tank Capacity		150 L			
Wheels & Tyres		195/85R16			
Seating Capacity		3			
DIMENSIONS – (MM)/WEIGHTS – (kg)/CAPACITIES – (L)					
Wheelbase (WB)		3,430			
Overall length (OL)		6,435			
Overall width (OW)		2,400			
Cab width		1,995			
Overall height (OH)		2,475			
Front Overhang (FOH)		1,115			
Road Clearance (RC)		170			
Front Track (FT)		1,655			
Rear Track (RT)		1,480			
Turning circle	Kerb to Kerb	11,800			
	Wall to Wall	13,200			
Indicative chassis mass–kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)					
Total		3,285		3,260	
Front		1,780		1,760	
Rear		1,505		1,500	
Standard Ratings	GVM	4,499			
	GCM	7,999			
Optional Ratings	GVM	5,500			
	GCM	8,000		9,000	

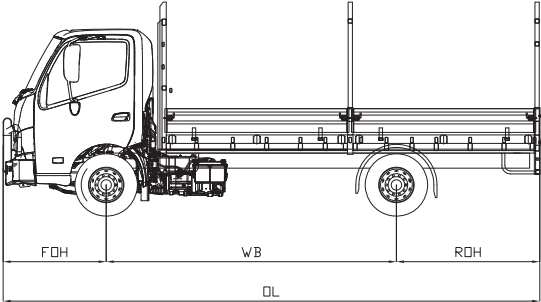

Drawings are for reference only to the dimensions table above. For specific layouts please refer to the applicable Body Mounting Manual (BMM).

## MODEL DETAILS

Model Description		716 AT 3430 WIDE STEELACE	717 MT 3430 WIDE STEELACE
Product Code		XZU710R-WKTQSQ3 SA	XZU710R-WKFQTQ3 SA
STEELACE details			
Internal length		4,375	
Internal width		2,310	
Floor thickness		3 mm	
Rope rails		25 mm	
Ladder racks		2	
Ladder rack rating		350 kg	
Drop sides		2	
Height of Drop sides & tailgate		300	
VEHICLE DETAILS			
Engine speed @ 100 Km/h		2,246rpm	2,213rpm
Max theoretical speed		138km/h	140km/h
Engine Power & Torque (hp & Nm)		150hp/420Nm	165hp/464Nm
Transmission type & number of forward gears		Automatic 6 speed	Manual 6 speed
Fuel Tank Capacity		150 L	
Wheels & Tyres		205/85R16	
Seating Capacity		3	
DIMENSIONS – (MM)/WEIGHTS – (kg)/CAPACITIES – (L)			
Wheelbase (WB)		3,430	
Overall length (OL)		6,435	
Overall width (OW)		2,400	
Cab width		1,995	
Overall height (OH)		2,475	
Front Overhang (FOH)		1,115	
Road Clearance (RC)		185	
Front Track (FT)		1,655	
Rear Track (RT)		1,520	
Turning circle	Kerb to Kerb	11,400	
	Wall to Wall	12,800	
Indicative chassis mass–kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)			
Total		3,400	3,365
Front		1,825	1,800
Rear		1,575	1,565
Standard Ratings	GVM	6,500	
	GCM	8,000	10,000
Optional Ratings	GVM	4,499	
	GCM	7,999	

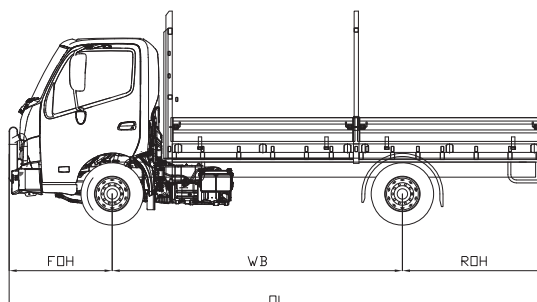

Drawings are for reference only to the dimensions table above. For specific layouts please refer to the applicable Body Mounting Manual (BMM).

## SteelAce Range

### SAFETY FEATURES

Active Safety Features		
Vehicle Stability Control	VSC	Equipped
Anti-lock Brakes System	ABS	Equipped
Pre-Collision System	PCS	Equipped
PCS is inclusive of	Autonomous Emergency Braking	AEB
	Pedestrian Detection	PD
	Lane Departure Warning System	LDWS
Traction Control	TC	Equipped
Reverse Camera	RC	Equipped
Easy and Smooth Start	ES	Equipped (MT models only)
Daytime Running Lamps	DRL	Equipped
Reverse Buzzer		Equipped
Passive Safety Features		
ECE-R29 Cab Strength Certification		Equipped
SRS airbags for driver & side passenger		Equipped
SRS seatbelt pretensioner for driver & side passenger		Equipped
Shock absorbing & collapsible steering column		Equipped
Door Impact Beams		Equipped

### BODY FEATURES

All steel construction
Rope rails
Ladder racks
Removable double drop sides with single tail gate
Front and rear side steps left & right

### GENUINE ACCESSORY OPTIONS

Chrome wheel covers
Cameras (up to additional 5 extra)
Dash and Floor mats
Dash Camera (DVR Camera System)
GPS navigation with live traffic (Truck spec)
Seat covers (Wool, Canvas, Carbon)
UHF CB Radio Kit
Stone guard
Sunvisor
Weathershields
Lane change assist cameras
Please check with your dealer for availability, price & fitment

For Cab Chassis related specifications not included in this document please refer to the applicable Cab Chassis spec sheet or Body mounting Manual

### WARRANTY

New vehicle warranty period

Light Duty Model	Axle configuration	Standard warranty (whichever comes first)	Cab corrosion perforation
300 Series	4 x 2	5 years or 250,000km	60 months

Battery warranty – 12 months from date of delivery  
\* For conditions, refer to the Hino Parts & Service warranty brochure

Genuine parts or accessories warranty – 3 years unlimited kilometres when fitted by an authorised Hino dealer \*  
Built to Go Body warranty – 5 years or 250,000km (whichever comes first)



### DISCLAIMER

Important notice – Hino Trucks are distributed in Australia by Hino Motor Sales Australia Pty Ltd A C N 064 989 724. All efforts have been made to ensure the information contained in this brochure was correct at time of printing or uploading. Hino Motor Sales Australia Pty Ltd reserves the right to alter any details of the specifications and equipment without notice. Hino in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance placed by any person on anything contained in this brochure. You should therefore check with your authorised Hino dealer at the time of ordering your motor vehicle to ensure that colour, specifications, equipment, design features and options are available for the vehicle you are ordering. Please note that some options may only be available in combination with others. Authorised Hino dealers will on request provide up to date information on all accessories, design features, prices & availability. \*\*Maximum Cruise control setting 106 km/h. \*\*\* GVM ratings of 4,499kg are conditional that the ADR definition of a "Goods Vehicle" can be met.