

HINO 300 Series

Tipper Range



*Image may contain items not standard to the model

KEY FEATURES

Factory Tipper bodies with drop sides
STD Cab & Wide Cab variants
Pre-Collision System (PCS) including AEB & PD
Vehicle Stability Control (VSC) including ABS & TC
Lane Departure Warning System (LDWS)
Daytime Running Lamps (DRL)
Dual SRS Airbags
Reverse Camera
ECE R-29 Cab Strength Certified
Cruise Control**
ADR 80/03 Emission level using Euro 5 Standard


KEY SPECIFICATIONS

GVM. 4,499 to 6,500 kg
GCM. GVM + 3,500kg
. Automatic up to 8,000kg
Power range 150hp to 165hp
Torque range 420Nm to 464Nm
Transmissions. . STD cab . . 5 spd Manual & 6 spd Automatic
. Wide cab . . 6 spd Manual & 6 spd Automatic
Wheelbases.2.5m to 4.2m*
Internal body length3.0m to 3.6m*

*See Model details for exact dimensions

MODEL DETAILS




Model Description		616 AT 2525 STD TIPPER		616 MT 2525 STD TIPPER	
Product Code		XZU605R-WKTMSQ3 T		XZU605R-WKMMSQ3 T	
TIPPER BODY					
Cubic Capacity		1.9m³			
Internal length (mm)		3,000			
Internal width (mm)		1,750			
Drop sides & tailgate height (mm)		370			
Deck plate thickness (mm)		3.2			
Front plate thickness (mm)		3.2			
Drop sides thickness (mm)		2.3			
Tailgate thickness (mm)		3.2			
Tipping angle (deg)		60°			
Hydraulic cylinder bore & stroke (mm)		100 x 350			
Hydraulic pump model		VC02-04		VC02-03	
Control		Lever in the cab			
Rope hooks		Equipped			
Rear Gate type		Single gate hinged from the top			
Shovel holder		Equipped			
Tailgate operation with tipper control		Auto release from bottom			
VEHICLE DETAILS					
Engine speed @ 100 Km/h		2,230rpm		2,500rpm	
Max theoretical speed		139km/h		124km/h	
Engine Power & Torque (hp & Nm)		150hp / 420Nm			
Transmission type & number of forward gears		Automatic 6 speed		Manual 5 speed	
Fuel Tank Capacity		80 L			
Wheels & Tyres		185/85R16			
Seating capacity		3			
DIMENSIONS – (mm)/WEIGHTS – (kg)					
Wheelbase (WB)		2,525			
Overall length (OL)		4,760			
Overall width (OW)		1,880			
Cab width		1,695			
Overall height (OH)		2,100			
Front Overhang (FOH)		980			
Road Clearance (RC)		170			
Front Track (FT)		1,400			
Rear Track (RT)		1,435			
Turning circle	Kerb to Kerb	9,600			
	Wall to Wall	10,800			
Indicative chassis mass – kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)					
Total		2,795		2,755	
Front		1,520		1,495	
Rear		1,275		1,260	
Standard Ratings	GVM	4,499kg			
	GCM	7,999kg			
Optional Ratings	GVM	5,500kg			
	GCM	8,000kg		9,000kg	

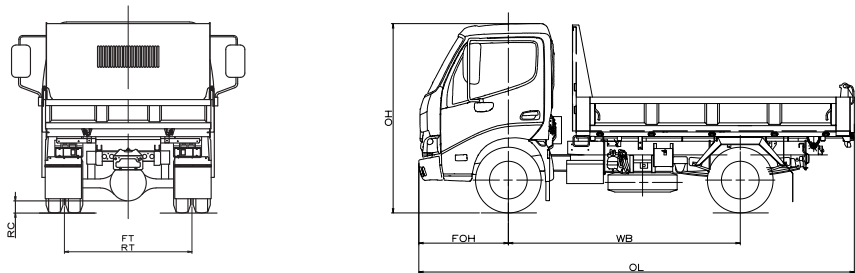

Drawings are for reference only to the dimensions table above.

MODEL DETAILS

Model Description		616 AT 2810 WIDE TIPPER	617 MT 2810 WIDE TIPPER	717 MT WIDE TIPPER
Product Code		XZU700R-WKTMSQ3 T	XZU700R-WKFMTQ3 T	XZU710R-WKFQTQ3 T
TIPPER BODY				
Cubic Capacity		2.1m³		3.0m³
Internal length (mm)		3,100		3,600
Internal width (mm)		1,900		2,000
Drop sides & tailgate height (mm)		370		430
Deck plate thickness (mm)		3.2		
Front plate thickness (mm)		3.2		2.3
Drop sides thickness (mm)		2.3		
Tailgate thickness (mm)		2.3		
Tipping angle (deg)		60°		55°
Hydraulic cylinder bore & stroke (mm)		100 x 350		100 x 480
Hydraulic pump model		VC02-06		VC03-15
Control		Lever in the cab		
Rope hooks		Equipped		
Rear Gate type		Single gate hinged from the top		
Shovel holder		Equipped		
Tailgate operation with tipper control		Auto release from bottom		
VEHICLE DETAILS				
Engine speed @ 100 Km/h		2165rpm	2,128rpm	2213rpm
Max theoretical speed		143km/h	145km/h	140km/h
Engine Power & Torque (hp & Nm)		150hp / 420Nm	165hp / 464Nm	
Transmission type & number of forward gears		Automatic 6 speed	Manual 6 speed	
Fuel Tank Capacity		100 L		150 L
Wheels & Tyres		195/85R16		215/85R16
Seating capacity		3		
DIMENSIONS – (mm)/WEIGHTS – (kg)				
Wheelbase (WB)		2,810		3,430
Overall length (OL)		5,115		5,870
Overall width (OW)		1,995		2,130
Cab width		1,995		
Overall height (OH)		2,190		2,230
Front Overhang (FOH)		1,115		
Road Clearance (RC)		170		185
Front Track (FT)		1,665		
Rear Track (RT)		1,480		1,520
Turning circle	Kerb to Kerb	9,800		11,400
	Wall to Wall	11,200		12,800
Indicative chassis mass – kg (STD tools, 10 litres of fuel, spare tyre & subject to a +/- 3% tolerance)				
Total		3,100	3,070	3,560
Front		1,765	1,745	1,865
Rear		1,335	1,325	1,695
Standard Ratings	GVM	4,499kg		6,500kg
	GCM	7,999kg		10,000kg
Optional Ratings	GVM	5,500kg		4,499kg
	GCM	8,000kg	9,000kg	7,999kg

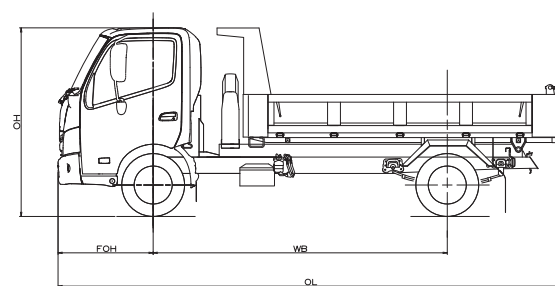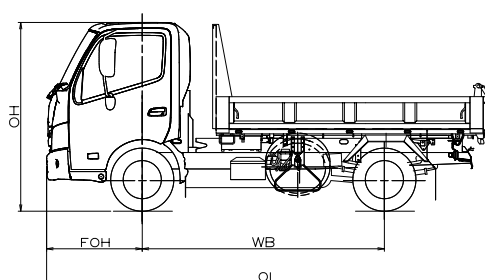

For specific layouts please refer to the applicable body mounting manual. (BMM)

Tipper Range

SAFETY FEATURES

Active Safety Features		
Vehicle Stability Control	VSC	Equipped
Anti-lock Brake System	ABS	Equipped
Pre-Collision System	PCS	Equipped
PCS is inclusive of	Autonomous Emergency Braking	AEB
	Pedestrian Detection	PD
	Lane Departure Warning System	LDWS
Traction Control	TC	Equipped
Reverse Camera	RC	Equipped
ES Start (MT models only)	ES	Equipped
Daytime Running Lamps	DRL	Equipped
Reverse Buzzer		Equipped
Passive Safety Features		
ECE-R29 Cab Strength Certification		Equipped
SRS airbags for driver & side passenger		Equipped
SRS seatbelt pretensioner for driver & side passenger		Equipped
Shock absorbing & collapsible steering column		Equipped
Door Impact Beams		Equipped

TIPPER BODY FEATURES

All steel construction with underbody hoist
Auto release tail gate
Drop sides & tail gate

GENUINE ACCESSORY OPTIONS

Bullbar or Nudge bar
Chrome wheel covers
Cameras (up to additional 5 extra)
Dash Camera (DVR Camera System)
Dash mat
Floor mats
GPS navigation with live traffic (Truck spec)
Retracting Tarp
Seat covers (Wool, Canvas, Carbon)
Stone guard
Sunvisor
Weathershields
UHF CB Radio Kit
Please check with your dealer for availability, price & fitment

For Cab Chassis related specifications not included in this document please refer to the applicable Cab Chassis spec sheet or Body mounting Manual

WARRANTY

New vehicle warranty period

Light Duty Model	Axle configuration	Standard warranty (whichever comes first)	Cab corrosion perforation
300 Series	4 x 2	5 years or 250,000km	60 months

Battery warranty – 12 months from date of delivery
* For conditions, refer to the Hino Parts & Service warranty brochure

Genuine parts or accessories warranty – 3 years unlimited kilometres when fitted by an authorised Hino dealer *



DISCLAIMER

Important notice – Hino Trucks are distributed in Australia by Hino Motor Sales Australia Pty Ltd A C N 064 989 724. All efforts have been made to ensure the information contained in this brochure was correct at time of printing or uploading. Hino Motor Sales Australia Pty Ltd reserves the right to alter any details of the specifications and equipment without notice. Hino in so far as it is permitted by law to do so, shall not be liable in any way as a result of any reliance placed by any person on anything contained in this brochure. You should therefore check with your authorised Hino dealer at the time of ordering your motor vehicle to ensure that colour, specifications, equipment, design features and options are available for the vehicle you are ordering. Please note that some options may only be available in combination with others. Authorised Hino dealers will on request provide up to date information on all accessories, design features, prices & availability. **Maximum Cruise control setting 106 km/h. *** GVM ratings of 4,499kg are conditional that the ADR definition of a "Goods Vehicle" can be met.